

inside view

Art.: 3120

5.880,- €

excl. VAT

AGRO-GATE

The gate system is completely pre-assembled, ready for use and only needs to be set up at the place of use. The DIN direction must be specified when ordering be specified. A subsequent change The DIN direction is also possible on site in just a few steps.

Description:

- **Clearance adjustable via limit switch**
2,5m - 6m; with 2 opposing doors max. 12m (double price)
- **Duty cycle** 40 cycles / day Clearance lights
- **Total height** approx. 2.000 mm
- **Movement cycles per day** max. 40
- **Ground clearance** approx. 140-160mm
- **Standard-compliant obstacle detection**
via force cut-off
- **Emergency release on the inside**
for emergency operation

Double wire mesh panel Version:

- **Height** 1800mm (corresponding to door height of approx. 2000mm)
- **6/5/6 - hot-dip galvanized**

Scope of delivery:

- **Galvanized bracket** with roller supports
- **Drive unit with a total length of 7,6 m**
- **Fence connection**
- **Gate opener**
Brand: Berner-AgroGate modification
- **1x 2-channel remote control SE-120**
- **Photoelectric beam sensor**
with retroreflector for the site fence
- **Power cord**
for on-site 230V outlet
- **6x passive safety contact strips**
(2x on the wing – 2x on the concrete block – 2x on the fence connection post)
- **Precast concrete unit**
Size: Length x Width x Height:
1600mm x 600mm x 700mm
- **Weight approx.:** 1500kg
- **Double wire mesh panel**
Height: 1800mm (total gate height including ground clearance: approx. 2000mm)
6/5/6 - galvanized
- **Duty cycle:** 40 cycles/day
- **The clearance width can be individually adjusted via limit switches**

Freight and shipping costs on request

SELF-SUFFICIENT VERSION



2495,- €

excl. VAT

Art.: 3154

Equipped with a waterproof, lockable technology box.

This contains the power electronics with charge control and a special battery. The technology is designed for tough applications from -20°C to +50°C.

A photovoltaic panel (nominal power WP: 180 W, size: 670 x 1490 mm) for charging the battery is included in the scope of delivery.

Incl. mast with various alignment options.

With a fully charged battery and continuous darkness, the system can still drive approx. 80 movements!

The complete technology is pre-wired and ready to plug in!

MANUAL VERSION



(Reduced price! Not discountable)
Gate system equipped for manual operation. Incl. pre-assembled ground bolt and ground sleeve
Supplied without electrical components and without safety contact strips

- 405,- €

excl. VAT

Art.: 3146

BIDIRECTIONAL CONTROL



2 gates are positioned opposite each other and achieve a clearance of 12m. With this control system, both leaves run synchronously with ONE push of a button

(if this option is not selected, each leaf operates separately)

460,- €

excl. VAT

Art.: 3147

LED FLASHING LIGHT



Incl. mounted aluminum pillar, serves as a warning when the door is running, already connected

295,- €

excl. VAT

Art.: 3157

REMOTE CONTROL TRANSMITTER



Type SE-120 with 2 buttons - 1 piece already included in the door price

46,- €

excl. VAT

Art.: 20001

WIRELESS CODE KEYPAD




Can be placed at any location within radio range without laying cables.

130,- €

excl. VAT

Art.: 20061

FREELY SELECTABLE RAL COLOR

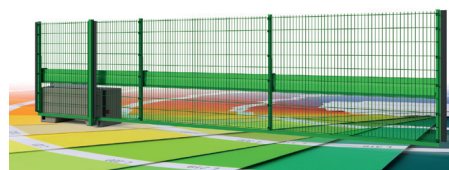

Customized powder coating according to your specifications

985,- €

excl. VAT

GUIDE POST



Incl. dowel plate for existing foundation and extension for setting in concrete incl. pre-mounted reflector. Used where there is an increased safety risk and provides additional support when closed

356,- €

excl. VAT

Art.: 3148

2 GROUND PEGS



Incl. 2 lugs for screwing to the precast concrete element
Twisting or lifting of the foundation is avoided

230,- €

excl. VAT

Art.: 3150

Lifting Eyes



For moving with crane slings
not possible with self-sufficient variant

45,- €

excl. VAT

Art.: 3159