


VT-YS50B MINI DUMP TRUCK

JINING VOTE MACHINERY TECHNOLOGY CO., LTD.


Model	VT-YS50B	
Machine weight	400Kg	
Maximum load	500Kg	
Engine	Brand	Briggs & Stratton
	Displacement	208cc
	Total power (HP)*@3600rpm	6.5 (4.8KW/3600)
	Fuel capacity	3.1L
	Oil capacity	0.6L
	Net weight	16.0kg
Travel motor	Brand	LeCroy Hydraulics
	Displacement	200cc
	Maximum working pressure	20MPa
	Maximum torque	805Nm
Walking speed	1.7/3.5 (km/h)	
Minimum turning radius	0.95m	
Track center distance	520mm	
Minimum ground clearance	85mm	
Gradeability	20°	
Hydraulic oil tank capacity	9L	
Hydraulic oil product number	46# anti-wear hydraulic oil	
Container volume	0.22 (1040*730*590) m³	
Length x width x height	1517x870x1278 (mm)	

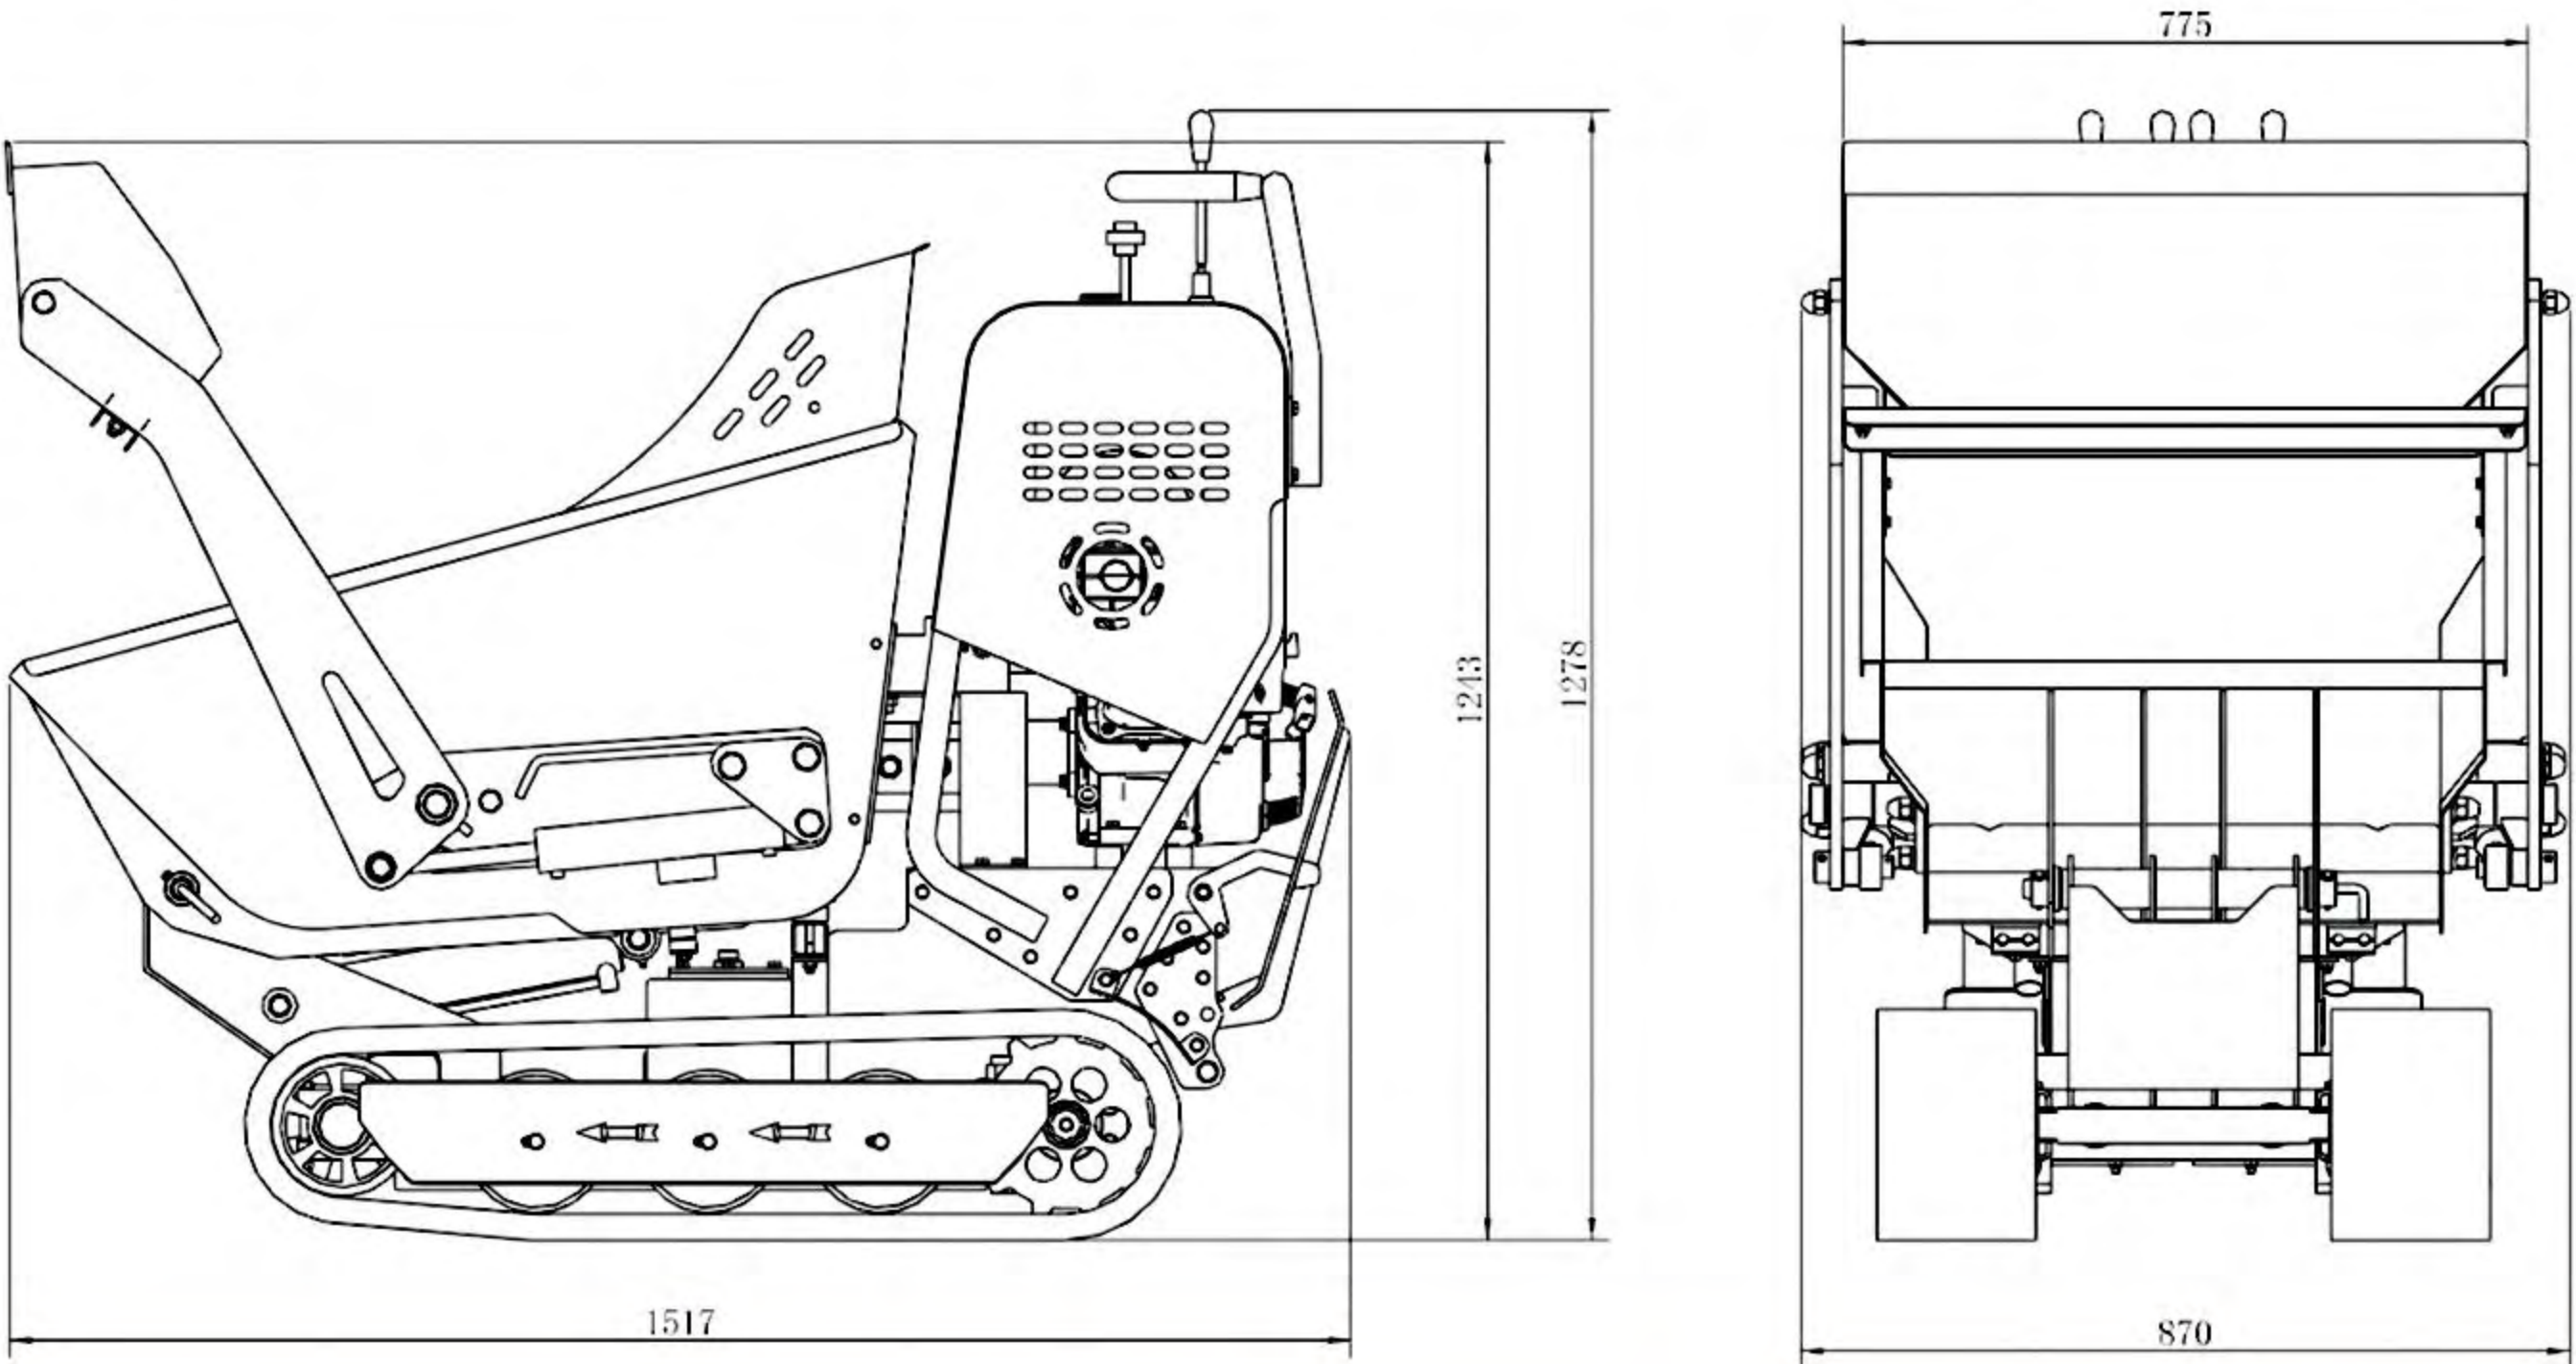

VT-YS50A MINI DUMP TRUCK

JINING VOTE MACHINERY TECHNOLOGY CO., LTD.

Model	VT-YS50A	
Machine weight	520kg	
Maximum load	500kg	
Engine	Brand	Briggs & Stratton
	Displacement	306cc
	Total power (HP)*@3600rpm	10 (7.4KW/3600)
	Fuel capacity	5.3L
	Oil capacity	1.1L
	Net weight	25kg
Travel motor	Brand	LeCroy Hydraulics
	Displacement	200cc
	Maximum working pressure	20MPa
	Maximum torque	805Nm
Walking speed	1.7/3.5 (km/h)	
Minimum turning radius	0.95m	
Track center distance	520mm	
Minimum ground clearance	85mm	
Gradeability	20°	
Hydraulic oil tank capacity	7L	
Hydraulic oil product number	46# anti-wear hydraulic oil	
Container volume	0.22 (1040*730*590) m³	
Length x width x height	1517x870x1278 (mm)	

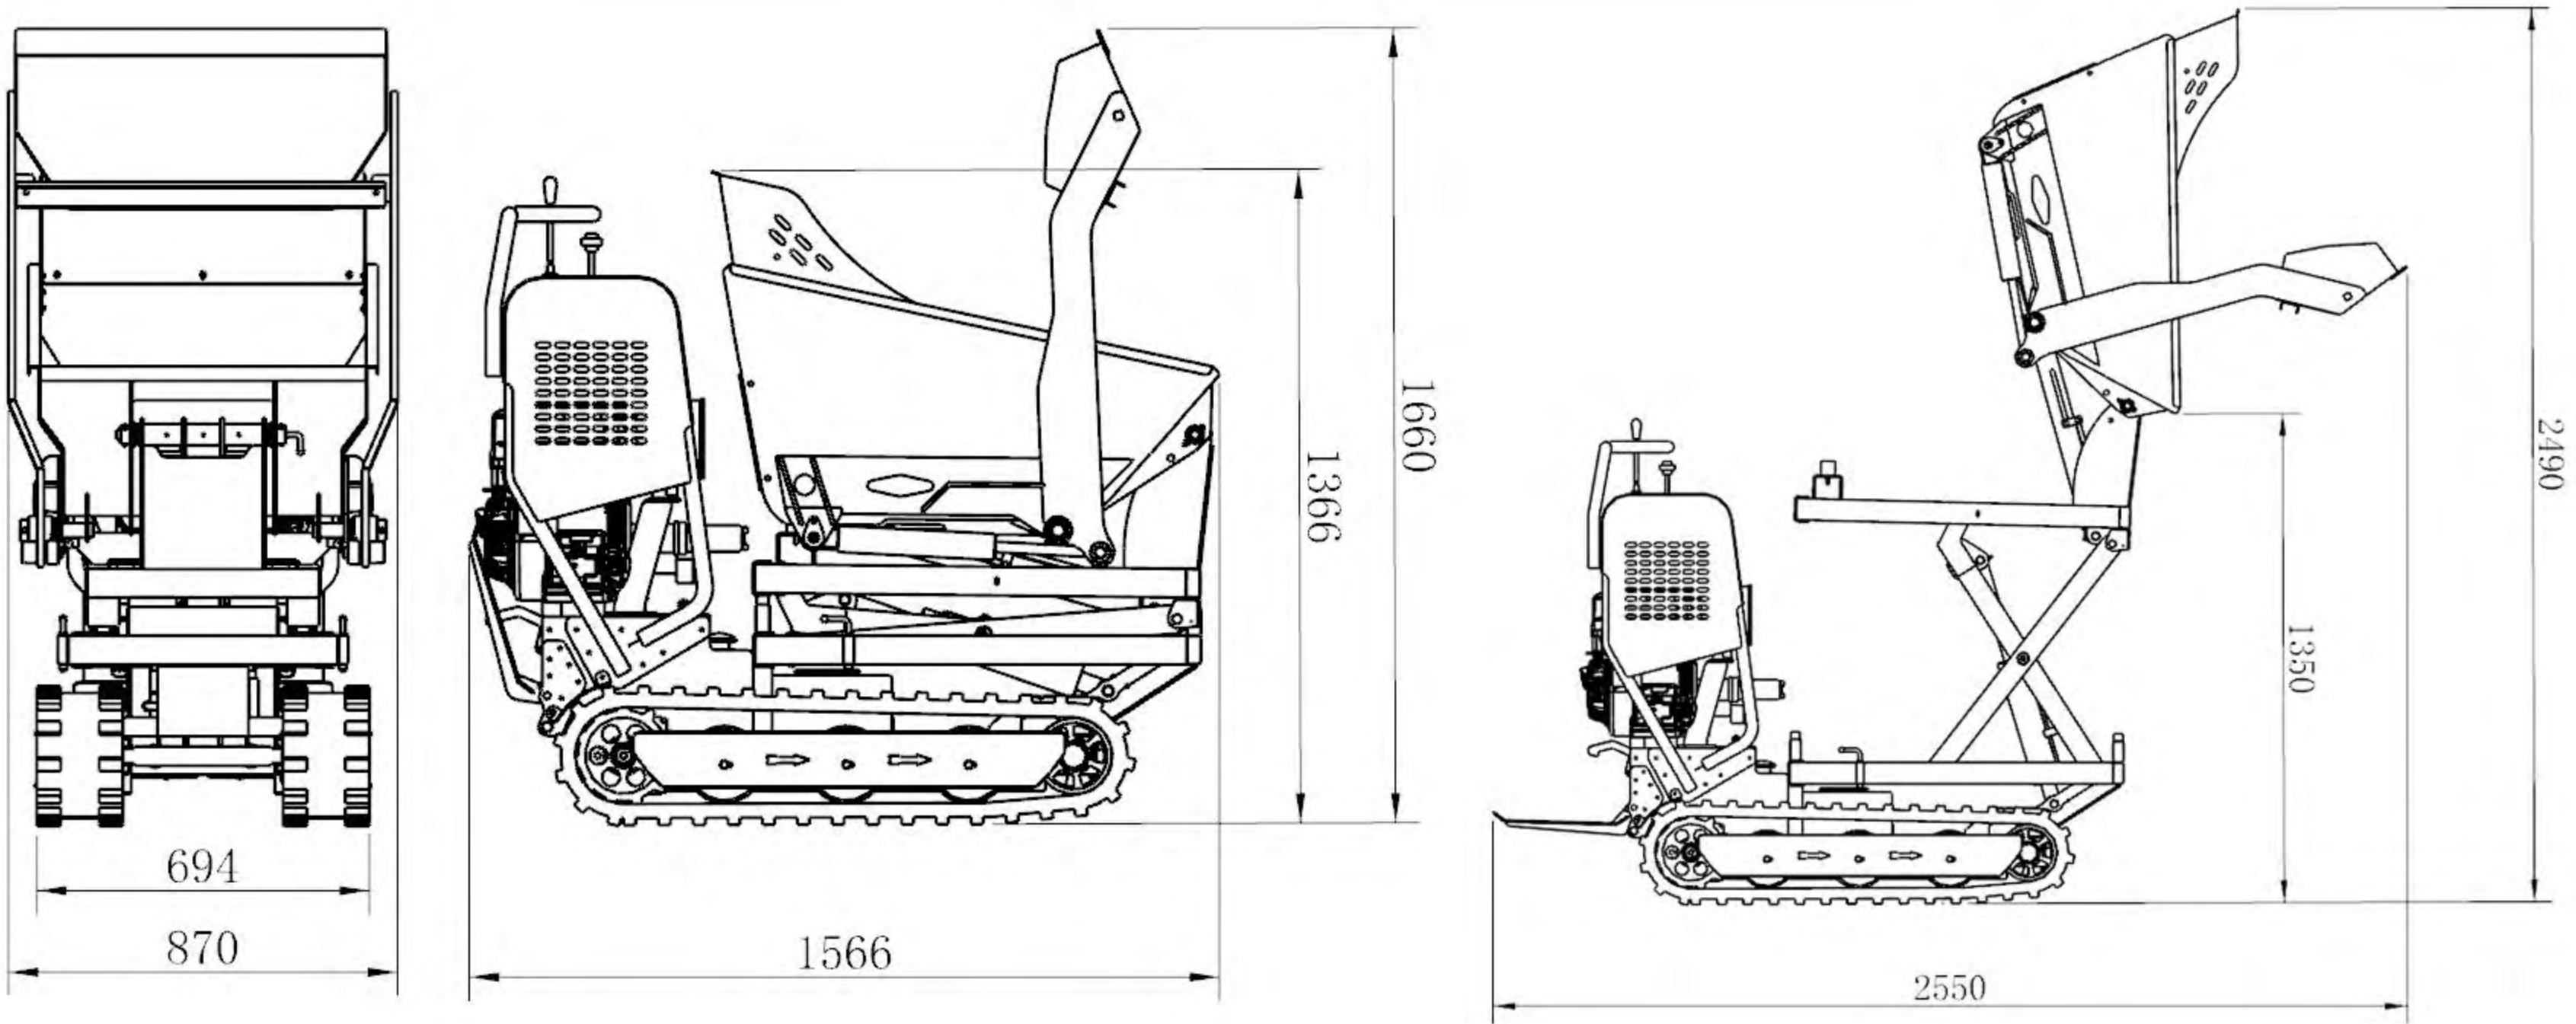

VT-YS80A MINI DUMP TRUCK

JINING VOTE MACHINERY TECHNOLOGY CO., LTD.

Model	VT-YS80A	
Machine weight	720kg	
Maximum load	800kg	
Engine	Brand	Briggs & Stratton
	Displacement	306cc
	Total power (HP)*@3600rpm	10 (7.4KW/3600)
	Fuel capacity	5.3L
	Oil capacity	1.1L
	Net weight	25kg
Travel motor	Brand	Songheng Hydraulic
	Displacement	315cc
	Maximum working pressure	16MPa
	Maximum torque	730Nm
Walking speed	2.1/4.2 (km/h)	
Minimum turning radius	1.35m	
Track center distance	620mm	
Minimum ground clearance	85mm	
Gradeability	20°	
Hydraulic oil tank capacity	16L	
Hydraulic oil product number	46# anti-wear hydraulic oil	
Container volume	0.26 (1235*730*590) m³	
Length x width x height	1982x870x1680 mm	



VT-500A MINI DUMPER

Lift + Bucket + Pedal



Bucket + Pedal



General parameters

Gasoline engine:	13hp,306cc
Net weight :	430kg
Transmission:	Hydraulic
Tipping method:	Hydraulic
Max loading capacity:	500kg
Bin size:	1000*700*450mm
EPA	

Package/load details


2.19CBM=1820*895*1340mm
take off the loader,put in the box
9units/20GP
36units/40HQ

General parameters

Gasoline engine:	9hp,270cc
Net weight :	370kg
Transmission:	Hydraulic
Tipping method:	Hydraulic
Max loading capacity:	500kg
Bin size:	1000*700*450mm


Package/load details

1740*740*2540mm/2units
9units/20GP
38units/40HQ

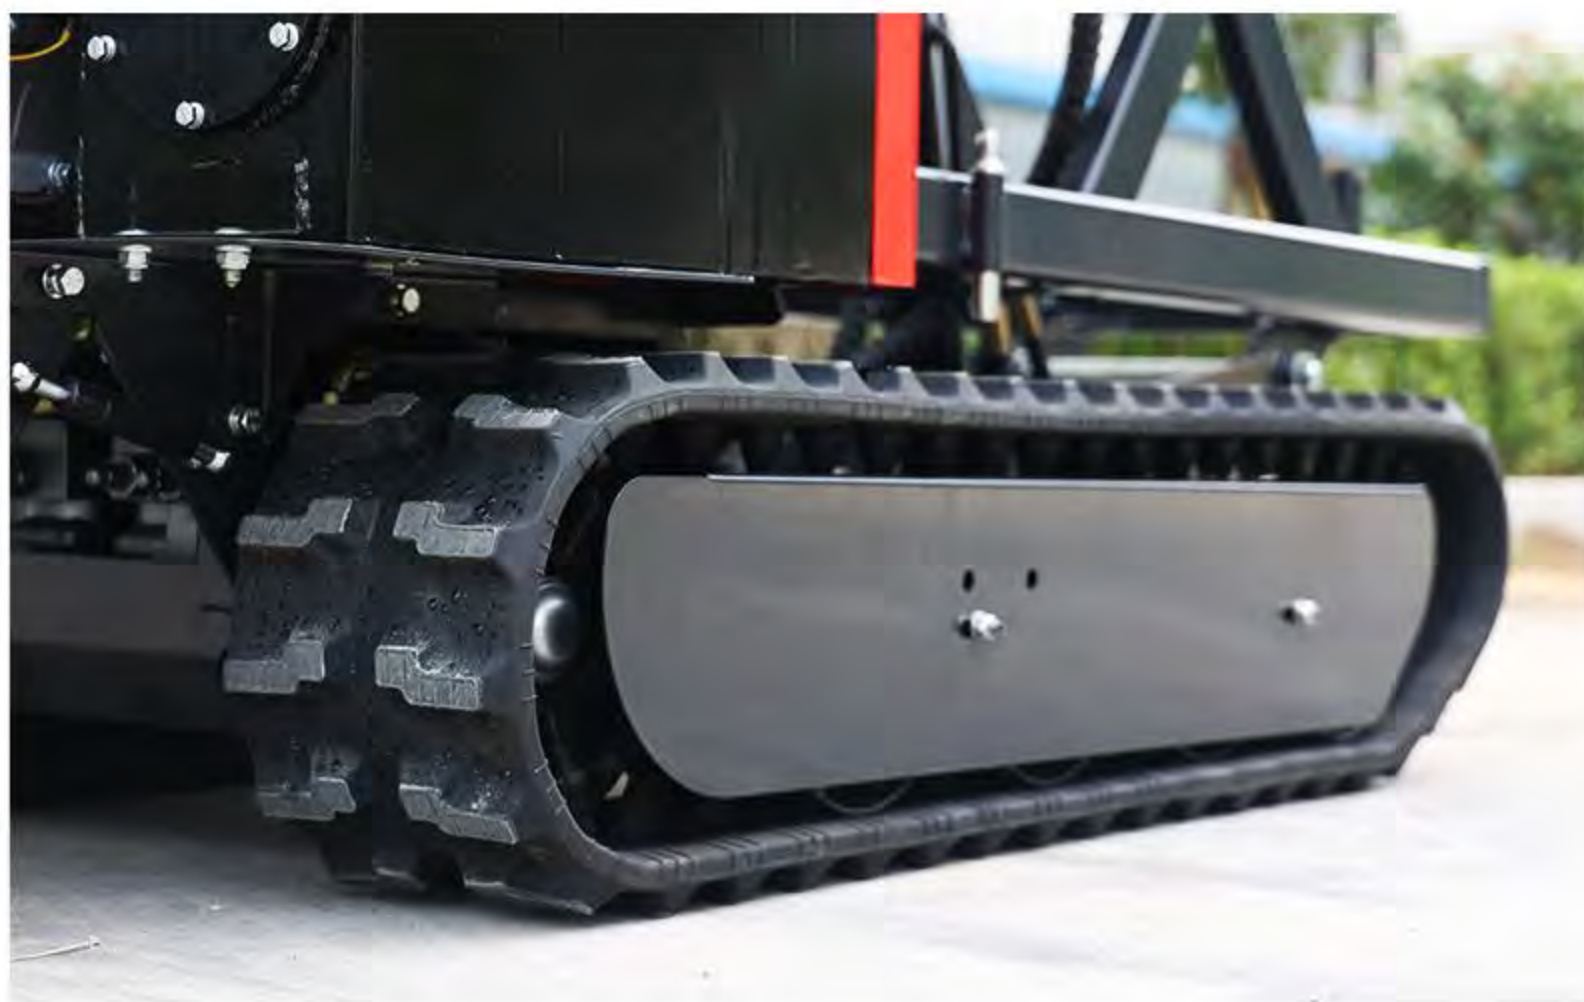


VT-500B MINI DUMPER

Lift + Bucket + Pedal

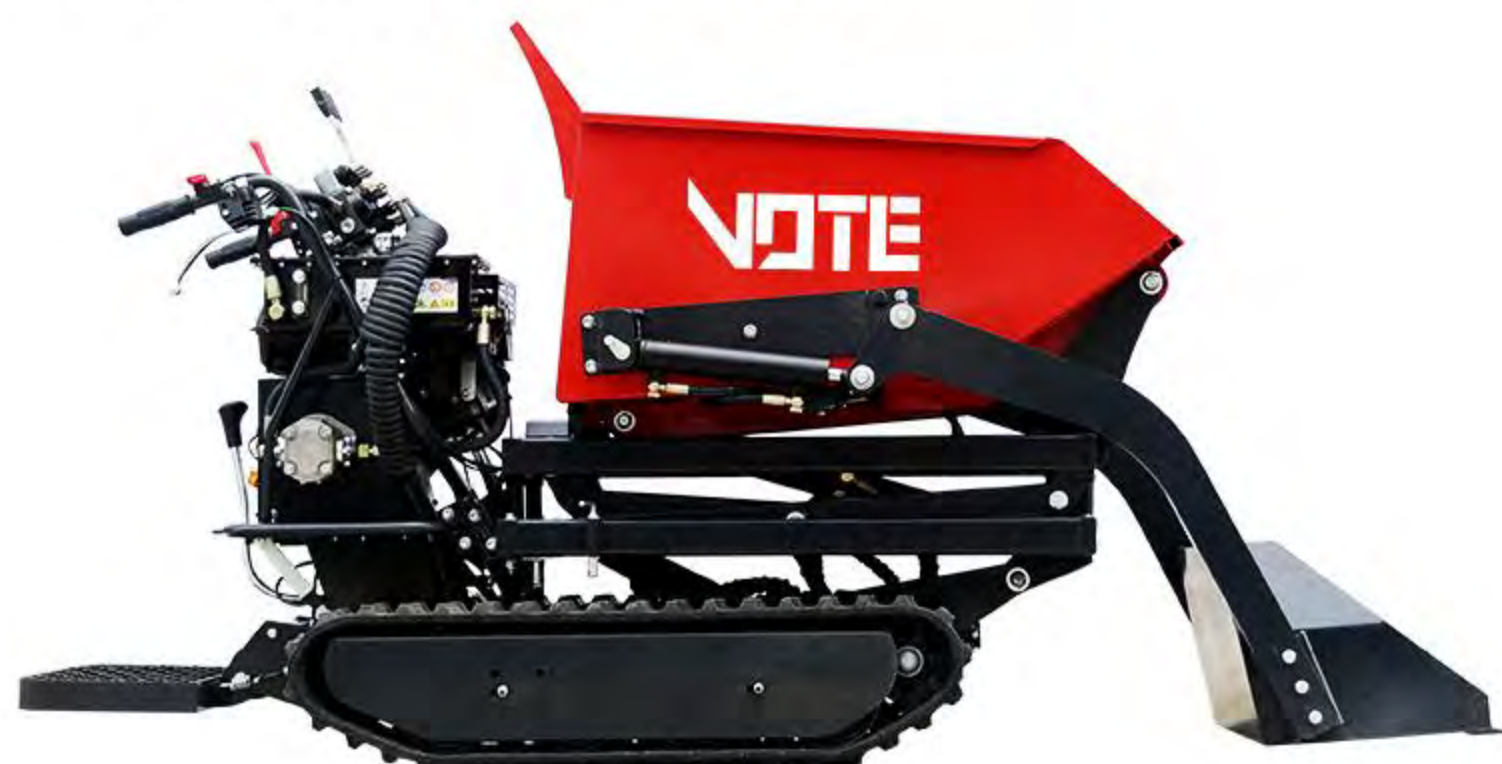

General parameters

Engine:	1-cylinder 4-stroke OHV LONCIN gasoline engine
Displacement:	9hp,270cc
Net weight :	370kg
Transmission:	3F+1R
Tipping method:	Hydraulic
Max loading capacity:	500kg
Track width:	180mm
Bin size:	1000*700*450mm

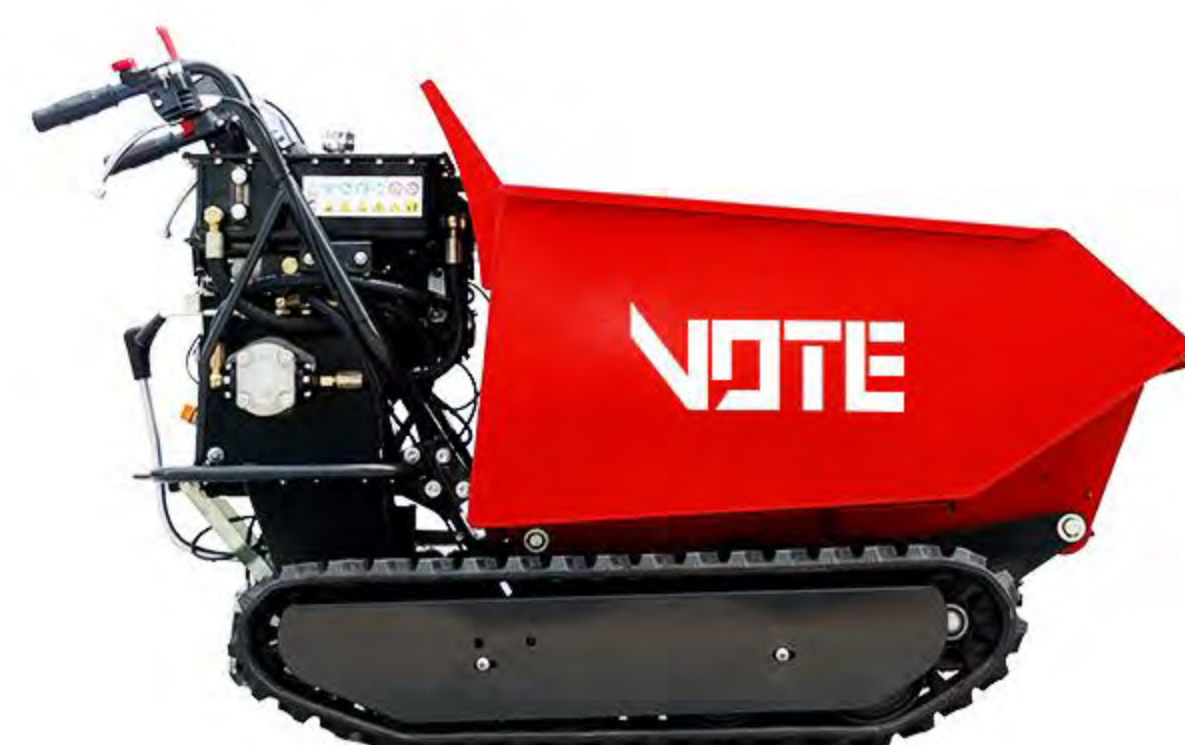

General parameters

Engine:	1-cylinder 4-stroke OHV LONCIN gasoline engine
Displacement:	9hp,270cc
Net weight :	280kg
Transmission:	3F+1R
Tipping method:	Hydraulic
Max loading capacity:	500kg
Track width:	180mm
Bin size:	1000*700*450mm

Package/load details

1.4CBM=1650*740*1150mm/unit
 2.83CBM=1650*740*2320mm/i pallet(2 units)
 20 units/20GP
 40 units /40GP
 42 units/40HQ



- VOTE introduces the new mini dumper - offering maximum versatility and light-touch operation.
- For indoor or outdoor use, the compact body design fits through wide and narrow doorways. The VT-500 Mini Dumper offers excellent load capacity and productivity.

VT-500C MINI DUMPER

General parameters

Engine:	1-cylinder 4-stroke OHV LONCIN gasoline engine
Displacement:	6.5hp, 196cc
Net weight :	245kg
Transmission:	3F+1R
Tipping method:	Manual
Max loading capacity:	500kg
Track width:	180mm
Bin size:	1100(1240)*700(840)*350mm

Package/load details

0.99CBM=1450*810*840/unit
 2.8CBM=1390*800*2520mm/1 pallet(3 units)
 20 units/20GP
 66 units/40HQ





VOTE SKID STEER LOADER



ACCESSORIES THAT CAN BE MATCHED >>



Borer



Rock Bucket



Closed Cleaner



The Bucket



Scarifier



Stump Crusher



Small Dig



Cleaner



High Tipping Bucket



Straight Dig



Rotary Plow



Lawn Mower



Cleaner



Pallet Fork



Straight Dig



4 in 1 Tipping Bucket



Snow Blower





Leveller



Bulldozers



Agitator

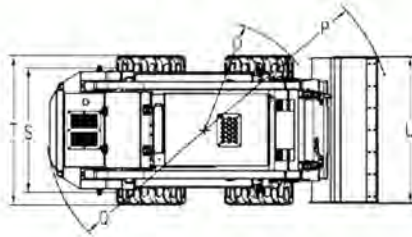MAIN PARAMETERS

Safety:

Class II anti-falling object protection cab, safe control design

Quick:

Quick and lightweight attachment quick-change system at the front

Sturdy:

High-strength frame and boom lift

All series:

With JC25-JC120, load from 300kg-1800kg from radial lift to heavy straight lift, from wheeled to crawler, a full range of skid steerloaders

MODEL	VJC25	VJC35	VJC35D	VJC45	VJC50D	VJC60	VJC65	VJC75	VJC100	VJC120
Operating load (kg)	380	500	500	700	850	850	950	1050	1100	1200
Max Speed (km/h)	9	10	6	12	6	12	12	12\18	12\18	12\18
Rated flux (L/min)	50	60	60	62.5	75	75	75	75	75	75
High Flow Flux (L/min)	/	/	/	/	/	/	120	120	140	140
Tire (track) model	6.50-10	8.5-16.5	28*9-15	10-16.5	28*9-15	12-16.5	12-16.5	12-16.5	12-16.5	12-16.5
Rated power (Kw)	18.7	37	37	xi	45	45	55	55	74	103
Fuel tank capacity (L)	28	60	60	70	80	80	75	75	90	90
self weight bucket (kg)	1300	2300	2300	2700	2800	2800	3400	3500	3550	3600
Bucket capacity (m³)	0.2	0.3	0.3	0.4	0.4	0.4	0.5	0.5	0.55	0.55
Overall operating height (mm)	3400	3300	3310	3980	3770	4000	4070	4070	4070	4070
Hheight to top of cab (mm)	1813	2000	1500	2140	1600	2160	2160	2160	2160	2160
Without bucket length (mm)	2200	2300	2400	2640	2800	2750	2880	2880	2880	2880
Overall length with bucket(mm)	2950	2950	3150	3420	3490	3490	3580	3580	3580	3580
Dumping height(mm)	2000	2000	1550	2380	2080	2400	2450	2450	2450	2450
Width (mm)	920	1350	1380	1720	1720	1880	1880	1880	1880	1880
Bucket width (mm)	1070	1400	1400	1740	1740	1880	1880	1880	1880	1880
Dumping angle at maximum height(°)	40	40	40	40	40	40	40	40	40	40
Dumping reach(mm)	441	790	660	700	700	750	700	700	700	700
Wheelbase(mm)	801	897	897	991	991	991	1115	1115	1185	1185
Ground clearance(mm)	145	140	150	185	205	205	205	205	205	205
Angle of departure(°)	20	20	20	20	20	20	20	20	20	20
Front tuning radius(mm)	1660	1760	1760	1958	2010	1958	2112	2112	2144	2144
Rear tuning radius(mm)	1253	1296	1296	1630	1746	1728	1774	1774	1857	1857
Tread width (mm)	785	1080	1080	1450	1450	1500	1500	1500	1500	1500