
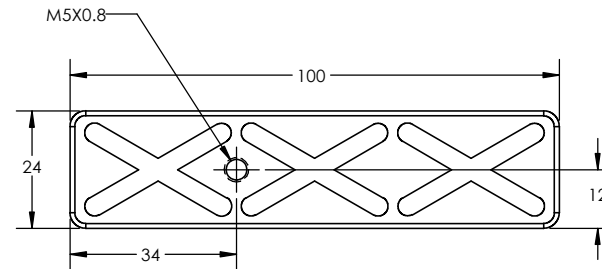
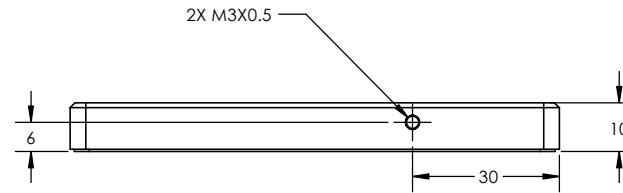



Title	Specification
Size	24mm x 100mm
Part Number	OAVBB24100
Input Pressure	0.27 to 0.68 MPa (40 to 100 PSI)
Ideal Load	398 N (89 lbs)
Flow	2.3 SCFH
Fly Height	5 micron
Bearing Height	10 mm
Bearing Weight	56 grams
Housing Material/Finish	Aluminum/Anodized
Porous Media Material	Carbon
Flatness	.0005mm (.00002 in)
Port Thread	M5 x 0.8, M3 x 0.5

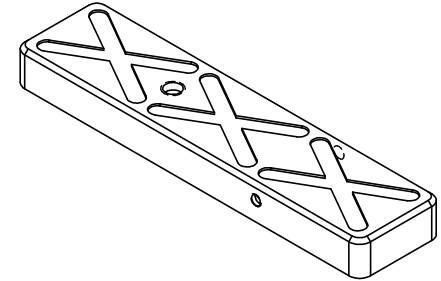

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF OAVCO LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF OAVCO LLC IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 <b>TITLE: 24MM X 100MM BONDED BEARING</b>	
		DIMENSIONS ARE IN MILLIMETERS		DRAWN	JS		1/12/23
		TOLERANCES:		CHECKED			
		FRACTIONAL ±		ENG APPR.			
		ANGULAR: MACH ± BEND ±		MFG APPR.			
		TWO PLACE DECIMAL ±		Q.A.			
		THREE PLACE DECIMAL ±		COMMENTS:			
		INTERPRET GEOMETRIC TOLERANCING PER:					
		MATERIAL ALUMINUM 7075/ CARBON				SIZE <b>B</b> DWG. NO. <b>OAVBB2398</b> REV <b>A</b>	
NEXT ASSY	USED ON	FINISH ANODIZE PER MIL-A-8625				SCALE: 1:1	
APPLICATION		DO NOT SCALE DRAWING				WEIGHT: SHEET 1 OF 1	