
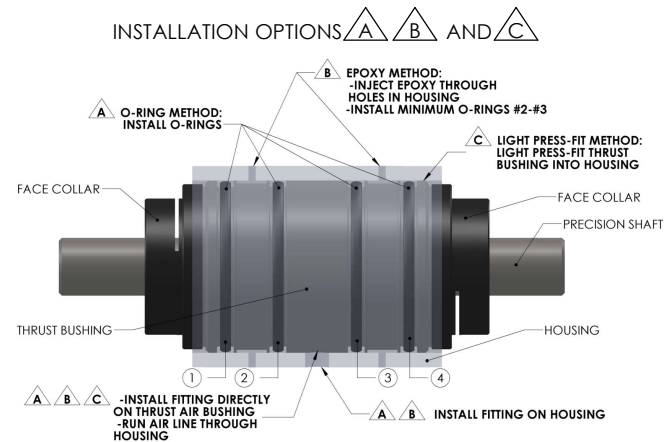




Title	Specification
Size	10mm ID
Part Number	OAVTB32i10
Housing Material/Finish	7075 Aircraft Quality Aluminum
Input Pressure	60 psi - 100 max psi
Porous Material	Carbon
Pressure Port Threads	M3x0.5
Lifetime	infinite
Radial Load Capacity	7.5 lb(33.2 N)
Thrust Load Capacity	20 lb (89 N)
Radial Stiffness	.046 lbs/μ in (8.5 N/μ m)
Pitch Moment Max	5.77 lbs-in (.62 N-m)
Bushing Inside Diameter (ID)	10.018 +.005/- .000
Bushing Outside Diameter (OD)	31.75 mm + .13/- .00
Bushing Length	52.8mm (2.100")
Bushing Weight	86 grams
Recommended Shaft Outside Diameter (OD)	10.000mm+.000/- .018
Flow Rate	13 SCFH

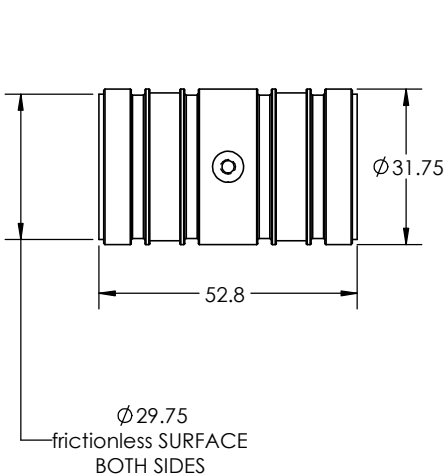

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
OAVCO LLC. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
OAVCO LLC IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:	NAME	DATE	 TITLE: 10MM 3-WAY THRUST BUSHING
		DIMENSIONS ARE IN MILLIMETERS	DRAWN		
		TOLERANCES:	CHECKED		
		FRACTIONAL ±	ENG APPR.		
		ANGULAR: MACH ± BEND ±	MFG APPR.		
		TWO PLACE DECIMAL ±	Q.A.		SIZE B DWG. NO. OAVTB32i10 REV A
		THREE PLACE DECIMAL ±	COMMENTS:		SCALE: 1:1 WEIGHT: SHEET 1 OF 1
NEXT ASSY		USED ON			
APPLICATION		DO NOT SCALE DRAWING			