

DC/DC Converter

120 Watt

120 SBB 110 D15 □□

$V_{I\text{ nom}} = 72\text{ V}$ $V_{O\text{ nom}} = \pm 15\text{ V}$ $I_{O1, O2\text{ nom}} = + 4.25\text{ A} \mid - 3.75\text{ A}$
 $V_{I\text{ nom}} = 110\text{ V}$

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
INPUT						
V_I	Input voltage range		40		154	V_{DC}
$V_{I\text{ min}}$	Converter shutdown				39.9	V_{DC}
$V_{I\text{ max}}$	Converter shutdown		156		158	V_{DC}
V_{Enable}	Enable Function, PIN d22 Reference potential: - V_I	Converter On: Enable = low $V_{\text{Enable}} \leq 0.8\text{ V}$, $I \leq 1.5\text{ mA}$	0		0.8	V_{DC}
		Converter Off: Enable = high $V_{\text{Enable}} \geq 3.0\text{ V}$, $I \leq -50\text{ }\mu\text{A}^*$	3.0		20	V_{DC}
	Stand by current	$40\text{ V} \leq V_I \leq 154\text{ V}$, Enable = high			18	mA
I_O	Input current	No load $V_I = 154\text{ V}$, $I_{O1} = 0\text{ A}$, $I_{O2} = 0\text{ A}$			70	mA
		Nominal load $V_I = 72\text{ V}$, $I_{O1} = 4.25\text{ A}$, $I_{O2} = -3.75\text{ A}$		1.8		A
		Nominal load $V_I = 110\text{ V}$, $I_{O1} = 4.25\text{ A}$, $I_{O2} = -3.75\text{ A}$		1.2		A
		Nominal load $V_I = 40\text{ V}$, $I_{O1} = 4.25\text{ A}$, $I_{O2} = -3.75\text{ A}$				3.3
	Input current integral	$V_I = 154\text{ V}$			15	A ² s
$I_{O\text{ max}}$	Max. input switch on current $V_I \geq V_{I\text{ min}}$, $V_{\text{Enable}} \rightarrow \leq 0.8\text{ V}$	$I_{O1} = 4.25\text{ A}$, $I_{O2} = -3.75\text{ A}$ $\Delta t \leq 200\text{ ms}$			6	A
	Input fuse		10 A Pico Fuse			
C_I	Converter input capacitance				25	μF
	External line inductance				50	μH
	Reverse input protection	Parallel diode + internal fuse	1.5KE160A			

OUTPUT: Power Unit

$40\text{ V} \leq V_I \leq 154\text{ V}$

$P_{O\text{ nom}}$	Output power			120		W
$V_{O\text{ nom}}$	Output voltage adjustment, factory set		± 14.9	± 15.0	± 15.1	V_{DC}
ΔV_O	Load regulation	$0\text{ A} \leq I_{O1, O2} \leq 8.0\text{ A}$ $T_A = -25^\circ\text{C} \dots +70^\circ\text{C}$ $T_A = -40^\circ\text{C} \dots +85^\circ\text{C}$	$\pm 2.5\% V_{O\text{ nom}}$ $\pm 3.0\% V_{O\text{ nom}}$			V_{DC} V_{DC}
$\Delta V_{O\text{ dyn}}$	Load regulation dynamic	$40\text{ V} \leq V_I \leq 154\text{ V}$, Puls load: 20 - 80 - 20 % x $I_{O1}, I_{O2\text{ nom}}$			± 250	mV
t_{dyn}	Response time	$40\text{ V} \leq V_I \leq 154\text{ V}$, Puls load: 20 - 80 - 20 % x $I_{O1}, I_{O2\text{ nom}}$		1	2	ms
$V_{O\text{ rms}}$	Ripple	$40\text{ V} \leq V_I \leq 154\text{ V}$ Nominal load BW 300 kHz		75	150	mV_{rms}
$V_{A\text{ pp}}$	Noise	$40\text{ V} \leq V_I \leq 154\text{ V}$ Nominal load BW 20 MHz			250	mV_{pp}
t_{on}	Turn on time V_O	$50.4\text{ V} \leq V_I \leq 154\text{ V}$, $0\text{ A} \leq I_O \leq 8.0\text{ A}$ Resistive load 1.) $V_I \geq V_{I\text{ min}}$, $V_{\text{Enable}} \rightarrow \leq 0.8\text{ V}$ 2.) $V_{\text{Enable}} \leq 0.8\text{ V}$, $V_I \rightarrow \geq V_{I\text{ min}}$	25		200	ms
t_h	Hold up time class S2 EN 50155 Necessary recharge time $t \leq 5\text{ sec}$ $I_{\text{out}} \geq \pm 1\text{ A}$	$50.4\text{ V} \leq V_I \leq 154\text{ V}$, $V_{O\text{ min}} = \pm 14.25\text{ V}$ $P_{\text{out}} \leq 120\text{ W}$	10			ms
	Overshoot shutdown V_O	$40\text{ V} \leq V_I \leq 154\text{ V}$ $0\text{ A} \leq I_{O1, 2} \leq 8.0\text{ A}$	Converter off: $V_{O1}, V_{O2} \leq 18\text{ V}$			
I_{O1}, I_{O2}	Output current	$40\text{ V} \leq V_I \leq 154\text{ V}$		+ 4.25 - 3.75		A A
	Output current limitation	$40\text{ V} \leq V_I \leq 154\text{ V}$	$1.05 \cdot I_{O\text{ nom}}$			A
	Output short circuit current I_{O1}, I_{O2}	Short circuit between + V_O and - V_O $40\text{ V} \leq V_I \leq 154\text{ V}$			± 5.0	A
	Sense lines	Max. voltage drop compensation			0.25	V
C_O	Output capacity converter	Output each output stage		6		mF

OUTPUT: Signals

PF	Power Fail, PIN z20	Transistor on: PF= low, $V_O < V_{O\text{ min}}$	$V_O < 0.95 \times V_{O\text{ nom}} \pm 2\%$	V
	Open Collector Transistor $V_{CE\text{ max}} \leq 70\text{ V}$, $I_{CE\text{ max}} \leq -20\text{ mA}^*$ Reference potential: - Sense	Transistor off: PF= high, $V_O \geq V_{O\text{ min}}$	$V_O \geq 0.95 \times V_{O\text{ nom}} \pm 2\%$	V
	Signals	Signal defined for $V_O \geq 0.6 \times V_{O\text{ nom}}$ $V_O > \pm 14.25\text{ V} \pm 2\%$	LED yellow ON	

GENERAL SPECIFICATIONS

f	Switching frequency	$V_I = 110\text{ V}$, $I_{O1, O2} = 8.0\text{ A}$	125		kHz
η	Efficiency	$50.4\text{ V} \leq V_I \leq 154\text{ V}$, $P_O \geq 0.7 \times P_{O\text{ nom}}$	86	90	%
	MTBF (SN 29500)	$V_I = 110\text{ V}$, $I_{O1, O2} = 8.0\text{ A}$, $T_A = +40^\circ\text{C}$		500 000	h
	No load, short circuit proof		Continuously		

* - Sign: sink current

SYMBOL	PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
--------	-----------	-----------------	-----	-----	-----	-------

SAFETY / DIMENSIONS

	Creepage, Clearance PCB FR4 V0	Input – output Input – case Output – case	2.0 2.0 1.0			mm mm mm
	Converter dielectric strength test every unit ramp function 2 s – 3 s – 2 s	Input – output Input – case Output – case			2100 2100 750	VDC VDC VDC
	Connectors DIN 41612	H15, Pin 24 leading				
	Pin assignment			see table		
	Protection class, protection system			I, IP 20		
	Dimensions w x h x d see figure	Plug - in unit incl. front panel Wall mounting, Din rail mounting TS35	61 x 128.4 x 160 (12 T / 3 U) 217 x 104 x 71			mm mm
	Weight	Plug - in unit incl. front panel Wall mounting, Din rail mounting TS35		0.95 1.5		kg kg

ENVIROMENTAL CONDITIONS

T _A	Operating temperature range	Continuously EN 50155 Class Tx for 10 min. + 85°C	- 40 - 40		+ 70 + 85	°C °C
T _{Storage}	Storage temperature range		- 40		+ 85	°C
	Cooling		Free air convection			
	Humidity	EN 50155, IEC 60571	75% averaged year, 95% 30 days			
	Vibration / shock Valid for plug - in unit and wall mounting	IEC 61373, IEC 68-2-27, BN 411002 Cat. I 3 shocks per axes	50 m / s ² , 30 ms			

EMC

	Emission	Line conducted and radiated	EN 50121 - 3 - 2: 2006		
	Immunity	ESD EN 61000 - 4 - 2	6 kV / 8 kV Performance criteria - B -		
		High frequency field EN 61000 - 4 - 3	20 V / m 80 MHz ... 1 GHz Performance criteria - A -		
		Burst EN 61000 - 4 - 4	Level 3 asym., sym. Performance criteria - A -		
		Surge EN 61000 - 4 - 5	2 kV asym. / 1 kV sym. R _i = 42 Ω Performance criteria - A -		
		HF – Current injection EN 61000 - 4 - 6	3 V _{eff} , R _i = 150 Ω Performance criteria - A -		


STANDARDS

Applied Standards:	EN 50155: 2006	BN 411 002	EN 50124 - 1: 1996	EN 50121 - 3 - 2: 2006	IEC 60571
	SN 29500	EN 50121 - 1	EN 50125 - 1	EN 60068 - 2 - 6, 2...27	EN 61000 - 4 - 2...6
	IEC 571	IEC 61373: 1999	EN 60721 - 3 - 5	EN 61373: 1999	EN 60529

Technical specifications valid for: - 40° C ≤ T_A ≤ + 70° C, 50.4 V ≤ V_I ≤ 137.5 V, unless otherwise noted.

H15 – Pin Assignment

Pin	
z 4	+ Sense
d 6	+ V _O
z 8	0 Sense
d 10	GND
z 12	GND
d 14	- V _O
z 16	- Sense
d 18	n.c.
z 20	Power Fail
d 22	Enable
z 24	⊥
d 26	+ V _I
z 28	+ V _I
d 30	- V _I
z 32	- V _I

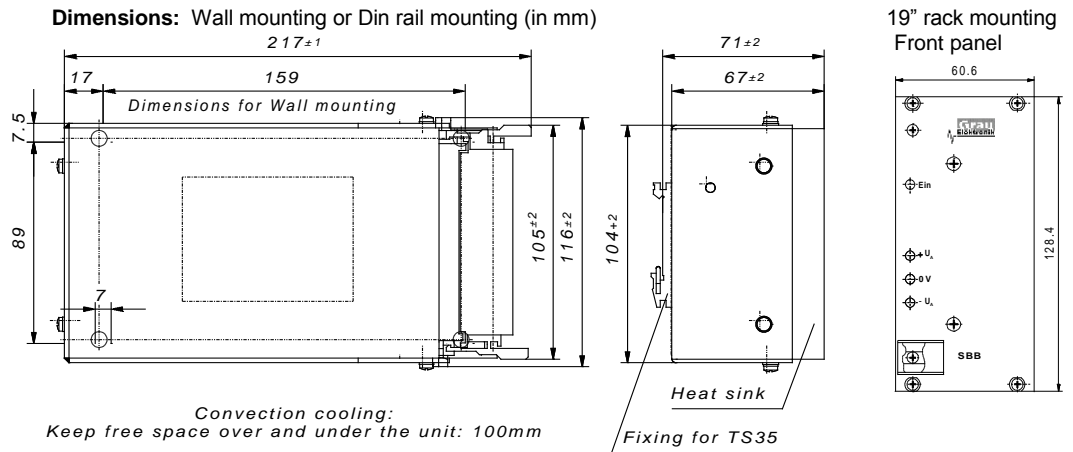

Order code: 120 SBB 110 D15 □0□ **select**

- x = individual customised front panel
- E = Plug - in unit
- W = Wall mounting
- H = Din rail mounting TS35