Slide Bar Hand Shower Kit With Waist Massage Function Installation Guide



Chrome



Brushed Nickel



Brushed Gold




Matte Black

◆ INSTALLATION CONDITION




1.Refer to the《Standard Part List》when unpacking , check all parts available .



2.Do not disassemble mixer body by yourself.

3.Connect inlet hoses to supply valves.



4.Make sure inlet pipes and supply valves have been installed and cleaned, also ensure no impurities in pipeline.


5.After installation , check all joints for leakages.

6.Suggest don't fit the faucet in the severely corrosive environments.

YOU MAY NEED:













PRODUCT LIST

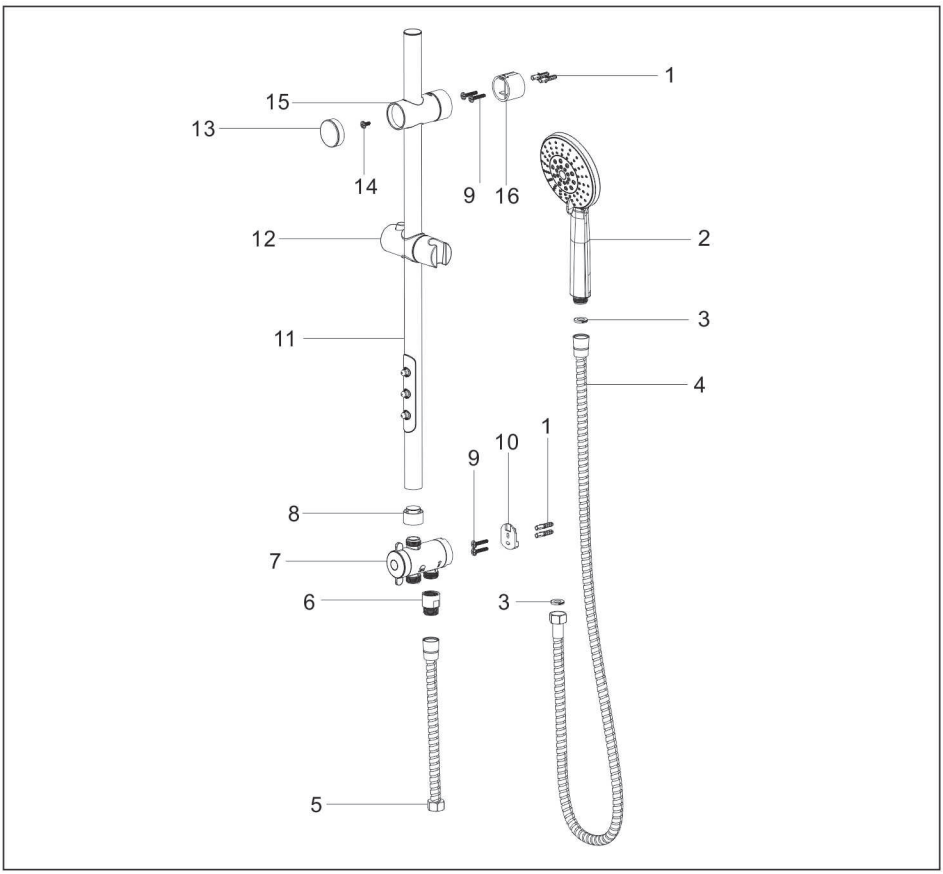

NO.	Name	Quantity		NO.	Name	Quantity
1	Rubber Expansion Anchor	4		9	Self-Tapping Screw	4
2	Multi-Function Hand Shower	1		10	Water Diverter Body Fixing Plate	1
3	Rubber Washer	2		11	Waist Massage Shower Rod	1
4	1.8M Shower Hose	1		12	Hand Shower Slide Bar	1
5	0.8M Angle Valve hose	1		13	Escutcheon Plate	1
6	Shower Check Valve Adapter	1		14	Set Screw	1
7	Water Diverter Body Assembly	1		15	Waist Shower Pipe Upper Fixing Seat	1
8	Waist Jet Pipe Fitting	1		16	Upper Seat Fixing Sleeve	1


◆ DIMENSION DRAWING

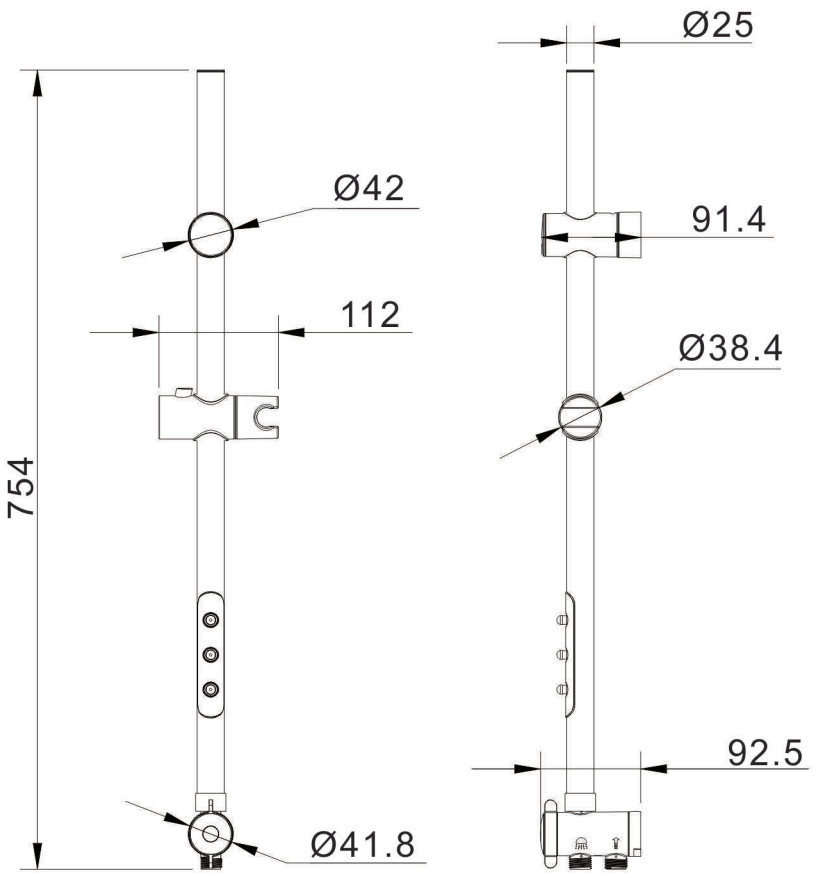


Unit: mm


◆ INSTALLATION SIZE & WATER PIPE LINE REFERENCE

Unit: mm

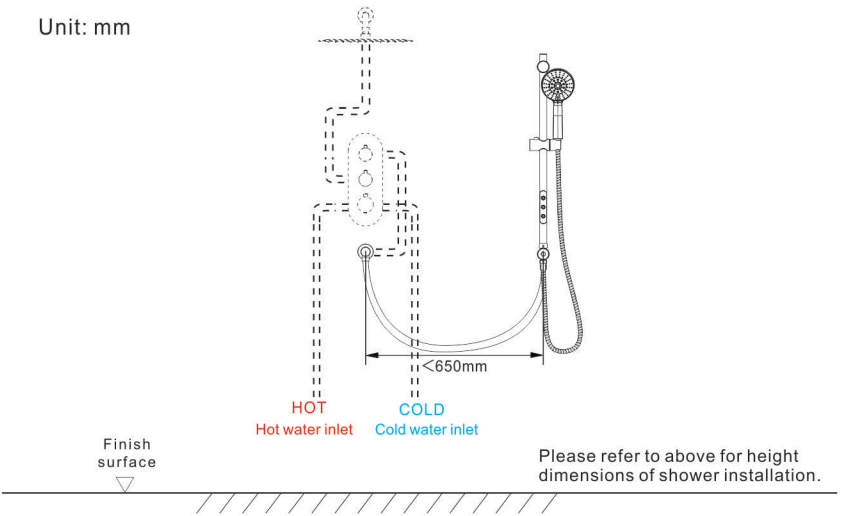


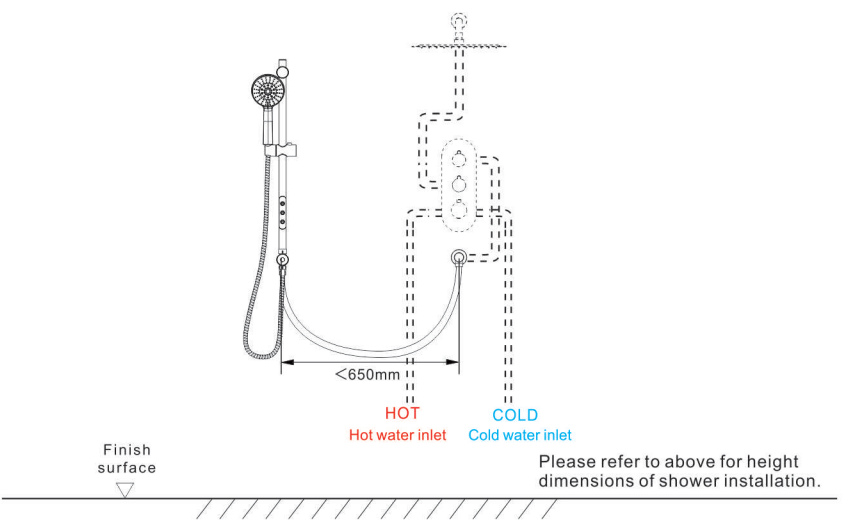


◆ PRODUCT INSTALLATION

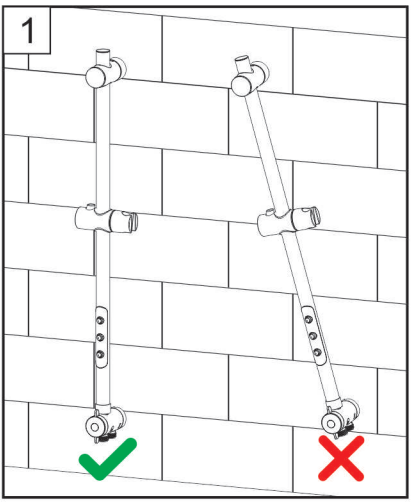


1. Before installation, please note that the lifting rod must be installed vertically and cannot be installed at an angle.

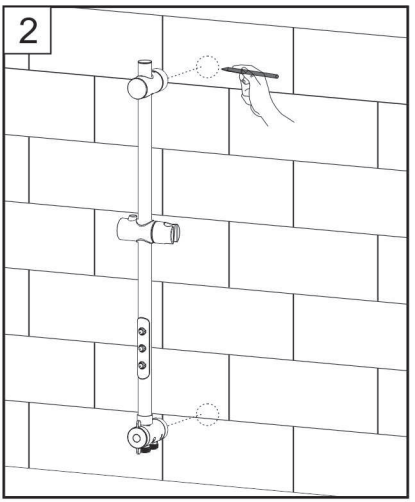


2. Place the lifting rod close to the wall, and use a pencil to draw circles on the wall along the upper and lower bases to mark the position.

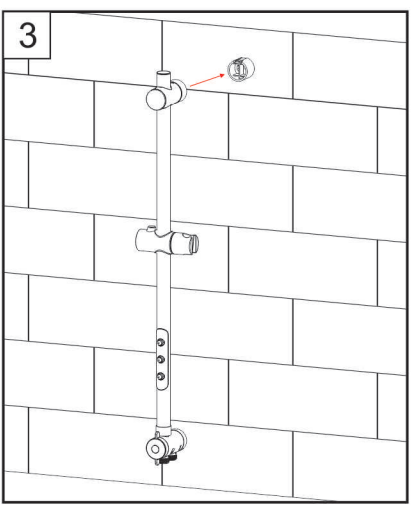


3. Pull out the mounting bracket at the back of the upper base.

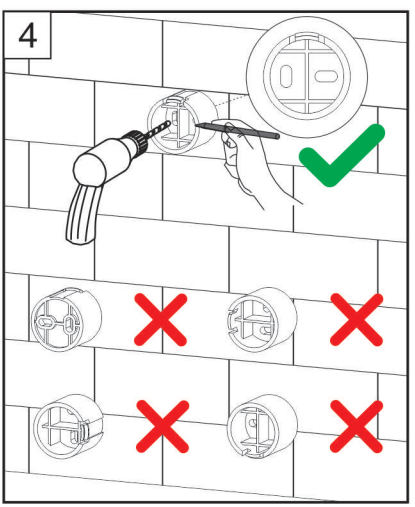


4. Identify the orientation of the mounting bracket, mark the wall with the correct mounting bracket, and drill holes.

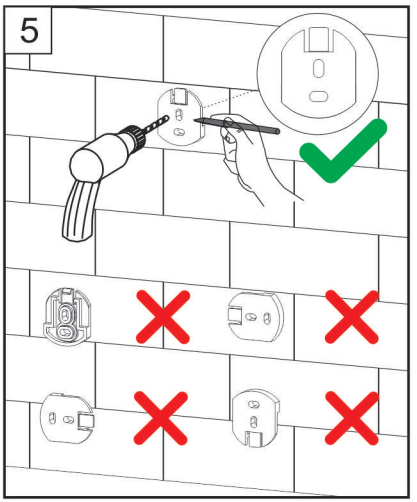


5. Identify the orientation of the mounting bracket, mark the wall with the correct mounting bracket, and drill holes.

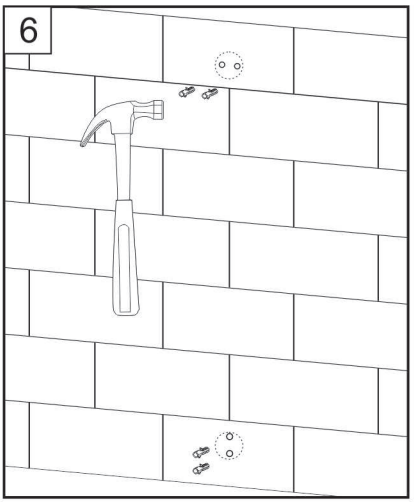


6. Use a hammer to knock the expanding rubber granules into the wall.

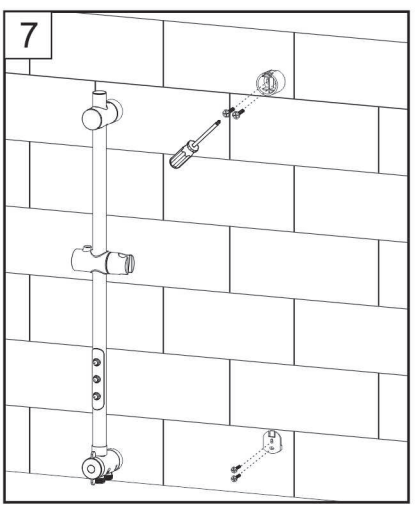


7. Secure the mounting bracket with screws.

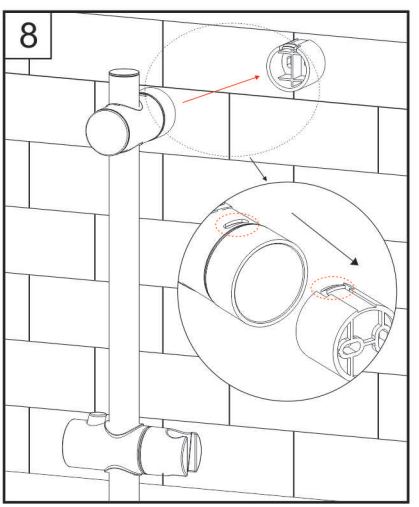


8. Secure the upper base firmly onto the fixed base.

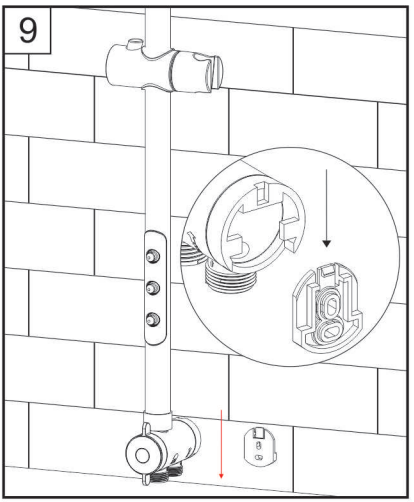


9. Press the lifting rod vertically down onto the fixed base.

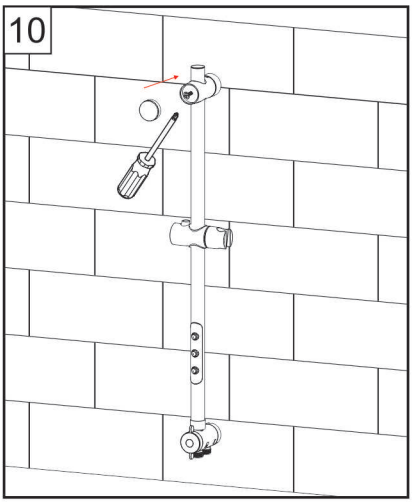

10. Open the decorative cover of the upper base, tighten the screws with a screwdriver, and then replace the decorative cover.

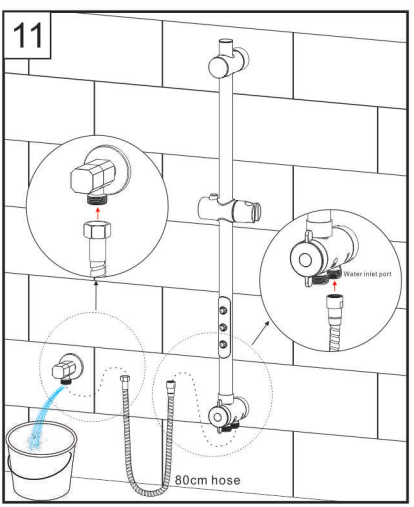



11. Open the angle valve to flush out impurities from the pipes. Then connect the lower base inlet using an 80cm flexible hose.

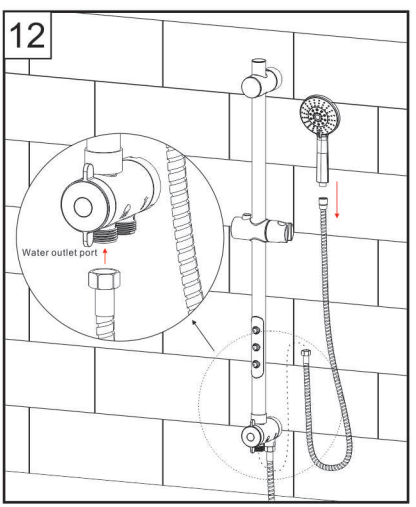

12. Connect the handheld shower head to the shower hose, and then connect it to the water outlet of the lower base.

◆ **NOTE**

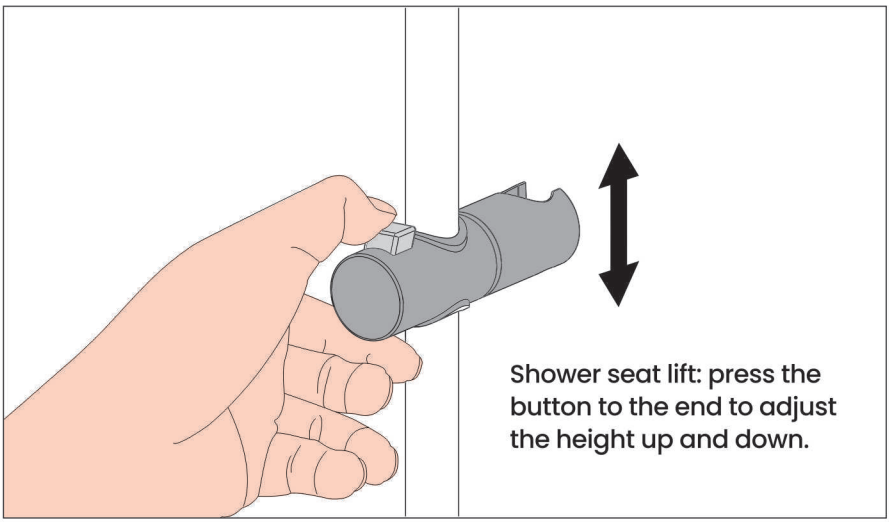
Shower seat lift: press the button to the end to adjust the height up and down.

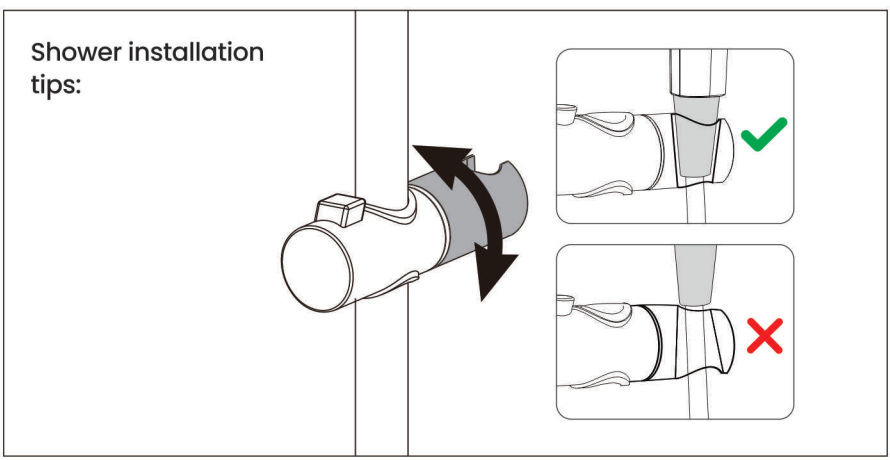
Shower installation tips:

◆ CARE AND MAINTENANCE

In order to keep the mixer surface bright , please clean the mixer regularly.



Rinse faucet with clean water and wipe with soft cotton cloth.

Avoid suing cleaning powder , harsh cleaning chemicals, brushes,and cloth with coarse surface to prevent scratching and corrosion.



Do not use acid cleaner to clean the faucet as it may cause surface corrosion of the faucet. If the faucet comes into contact with harmful acid substances, please rinse it with water immediately.

◆ IF ALARGE-SCALE CLEAN-UP IS NECESSARY, FOLLOW THESE PROCEDURES

1:Use clean water and soft cloth to remove dirt on the surface as much as possible.

2:Use one of the following cleaners to remove dirt on the surface

Mild liquid cleaner.

Colorless glass cleaner, powder cleaner which does not have abrasive function and can be dissolved completely.

Polish liquid which does not abrasive function.

3:After cleaning, remove the cleansing agent with clean water completely and wipe with soft cotton cloth.