

SPECIFICATIONS

Applications:

The RT Cart – Edge is designed to hold up to 10 rectangular tables stacked on edge. A handle is provided at the swivel caster end of the cart allowing the user to steer the cart. Handles are also provided on the sides of the cart to hold the tables up on edge. Distance between handles 27 1/2".

QUICK SPECS				
Size	Width	Height	Length	Weight
18-3060	30"	39 3/8"	62 1/2"	75 lbs.
18-3672	30"	39 3/8"	74 1/2"	78 lbs.
18-3696	30"	39 3/8"	98 1/2"	81 lbs.
Table Width		Height Loaded		
18-30"		39 3/8"		
36"		44 1/8"		


Primary Structure:

Part	Material Size
Main Frame	bent and punched 14 gauge (.083) steel sheet metal
Handle Sockets	1 1/4" x 11 gauge (.120 wall) round tubing
Front Handle	1" x 14 gauge (.083 wall) round tubing
Side Handles	1" x 12 gauge (.109 wall) round tubing

Casters:

The wheels shall be not less than 1 1/4" wide x 5" diameter, non-marring, flat tread, thermoplastic elastomer, with 3/8" ball or roller bearings.

Wheels shall be mounted on two swivel caster rigs and two fixed caster rigs. They shall have a load capacity of not less than 325 pounds each.

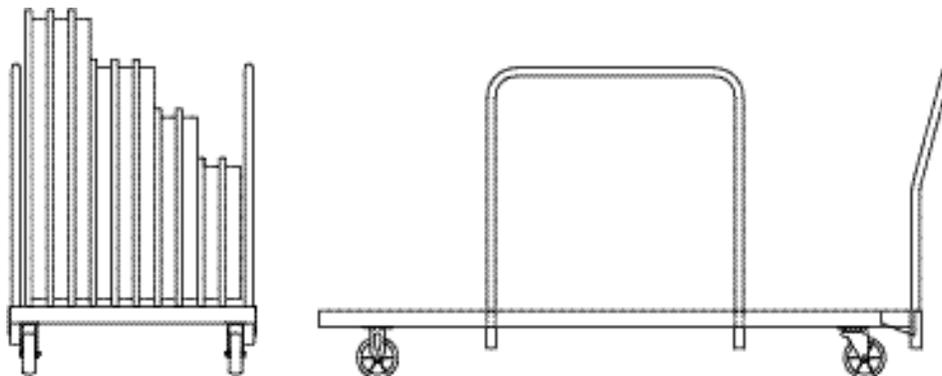

PART NUMBER EXAMPLE: CRT18-60EBLK2

www.mitylite.com 1.800.327.1692 • 1.801.224.0589 • fax 1.801.224.6191