

RT Cart – Flat



the leader in lightweight durability

SPECIFICATIONS

Applications:

The RT Cart – Flat is designed to hold up to 10 rectangular tables stacked flat on the cart. A handle is provided at the swivel caster end of the cart allowing the user to steer the cart. The tables contain stacking buttons at each corner helping to keep them from sliding off of each other.

QUICK SPECS

Cart Size	Width	Height		Depth	Weight
		w/standard handle	w/short handle		
2460	24"	38 1/4"	26 1/4"	62"	44 1/2" lbs.
2472	24"	38 1/4"	26 1/4"	74"	50 1/2" lbs.
2496	24"	38 1/4"	26 1/4"	98"	56 1/2" lbs.
3048	30"	38 1/4"	26 1/4"	50"	44 lbs.
3060	30"	38 1/4"	26 1/4"	62"	49 lbs.
3072	30"	38 1/4"	26 1/4"	74"	54 lbs.
3096	30"	38 1/4"	26 1/4"	98"	59 lbs.
3672	36"	38 1/4"	26 1/4"	74"	56 lbs.
3696	36"	38 1/4"	26 1/4"	98"	62 lbs.


Primary Structure:

Part	Material Size
Main Frame	bent and punched 14 gauge (.083) steel sheet metal
Handle Sockets	1 1/4" x 11 gauge (.120 wall) round tubing
Handles	1" x 14 gauge (.083 wall) round tubing

Casters:

Wheels shall not be less than 1 1/4" wide x 5" diameter, non-marring, flat tread, thermoplastic elastomer, with 3/8" ball or roller bearings.

Wheels shall be mounted on two swivel caster rigs and two fixed caster rigs. They shall have a load capacity of not less than 325 pounds each.

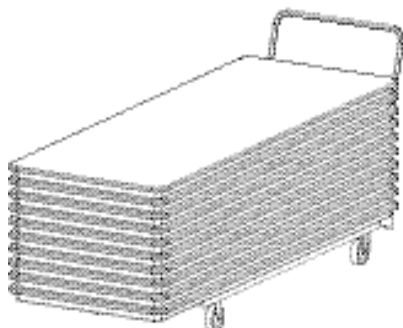

PART NUMBER EXAMPLE: CRT2460FBLK2

www.mitylite.com 1.800.327.1692 • 1.801.224.0589 • fax 1.801.224.6191