




Applications



Classrooms



Retail



Home



Large surfaces

















Hotels




Restaurants

Specifications (Series luminaires)




 Voltage (V)	220-240V	 Measures	241x154x103mm
Hz Frecuency (Hz)	50-60Hz	 Mounting position	Empotrar
 Current (A)	800mA	 Inclination	50°
ϕ Power factor (Cos fi)	0.96	ϕ_{LUM} Flux (lm)	2.164lm
 Dimming	No	 Electrical isolation	CII
 IP Tightness index	IP20	 Lifetime	L70>30.000h
 Body color	White		
 Diffuser Material	VT		
 Body	AL		
 Reflector	AL AN		
K Colour temperature	3.000K		
 CRI Colour rendering index	>80		

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions

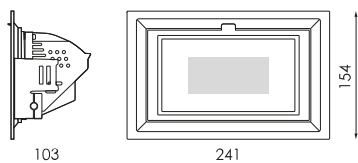

References

	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K	
144544	25,8W	30W	800mA	2.705lm	2.164lm	67°	3.000K	241x154x103m

Photometry

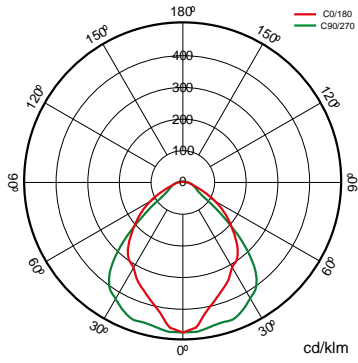

On request



Dali



Emergency kit



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description




Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive