

















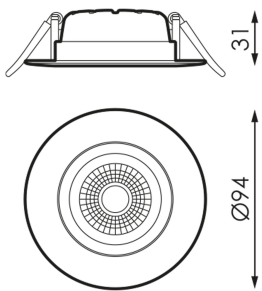
Specifications

	Voltage (V)	180-250
Hz	Frecuency (Hz)	50-60
Φ	Power factor (Cos fi)	$\geq 0,5$
	Dimming	No
	IP Tightness index	20
	Body color	White
	Body	AL
K	Colour temperature	3000k
	CRI Colour rendering index	≥ 80
	Opening angle	45°
	Measures	Ø94x31
	Mounting position	Recessed Ceiling
	Inclination	25°
	Operating temperature	-5 +35
Φ_{LUM}	Flux (lm)	493lm
	Electrical isolation	II
	Lifetime	50.000h
	L70 B10>(500<l≤1.000mA)	L70 >50.000h


References 

	W	K				
171021	6,5W	3000k	White	Ø75-80	Ø94x31	Yes

Dimensions 



Photometry 

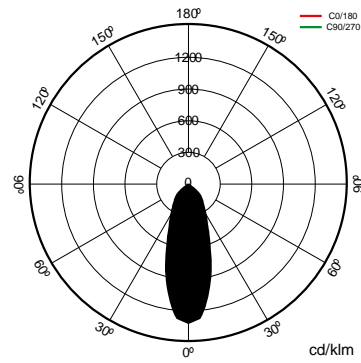

On request



Emergency kit 1h



Dali

Solutions

S



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



You need

description



Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.grupoprilux.com