



## Specifications (Series luminaires)

|                                                                                   |                              |         |
|-----------------------------------------------------------------------------------|------------------------------|---------|
|  | <b>Electrical isolation</b>  | CI      |
|  | <b>Voltage (V)</b>           | 230V    |
|  | <b>Frecuency (Hz)</b>        | 50/60Hz |
|  | <b>Power factor (Cos fi)</b> | ≥0,5    |
|  | <b>Dimming</b>               | No      |

|                                                                                   |                           |             |
|-----------------------------------------------------------------------------------|---------------------------|-------------|
|  | <b>Bushing type</b>       | E14         |
|  | <b>IP Tightness index</b> | IP20        |
|  | <b>Body color</b>         | Transparent |
|  | <b>Diffuser Material</b>  | VT          |

|                                                                                     |                                   |       |
|-------------------------------------------------------------------------------------|-----------------------------------|-------|
|   | <b>Colour temperature</b>         | 2700K |
|  | <b>CRI Colour rendering index</b> | >80   |
|  | <b>Opening angle</b>              | 360°  |

|                                                                                     |                 |            |
|-------------------------------------------------------------------------------------|-----------------|------------|
|  | <b>Measures</b> | 35x35x97mm |
|-------------------------------------------------------------------------------------|-----------------|------------|

|                                                                                     |                              |   |
|-------------------------------------------------------------------------------------|------------------------------|---|
|  | <b>Operating temperature</b> | - |
|-------------------------------------------------------------------------------------|------------------------------|---|

|                                                                                     |                  |       |
|-------------------------------------------------------------------------------------|------------------|-------|
|  | <b>Flux (lm)</b> | 403lm |
|-------------------------------------------------------------------------------------|------------------|-------|

|                                                                                     |                 |                  |
|-------------------------------------------------------------------------------------|-----------------|------------------|
|  | <b>Lifetime</b> | (L70B50>)20.000h |
|  | <b>Lifetime</b> | (L70B50>)20.000h |


|                                                                                     |                                  |     |
|-------------------------------------------------------------------------------------|----------------------------------|-----|
|  | <b>CEE Energy classification</b> | A++ |
|-------------------------------------------------------------------------------------|----------------------------------|-----|

## References



|  | W  | $\phi$     | $\phi_{LUM}$ | K              | $\leftrightarrow$ |
|-----------------------------------------------------------------------------------|----|------------|--------------|----------------|-------------------|
| <b>237352</b>                                                                     | 4W | $\geq 0,5$ | 403lm        | 2700K<br>2700K | 35x35x97mm        |

## Dimensions

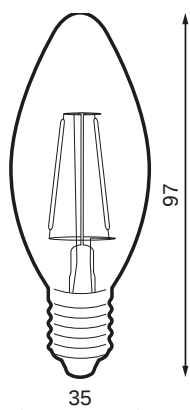

## Photometry



## Info



Hasta fin de existencias