



Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	230V
	Frecuency (Hz)	50/60Hz
	Power factor (Cos fi)	≥0,5
	Dimming	No

	Bushing type	E14
	IP Tightness index	IP20
	Body color	Transparent
	Diffuser Material	VT

	Colour temperature	2700K
	CRI Colour rendering index	>80
	Opening angle	360°

	Measures	35x35x123mm
---	-----------------	-------------

	Operating temperature	-
---	------------------------------	---

	Flux (lm)	403lm
---	------------------	-------

	Lifetime	(L70B50>)20.000h
	Lifetime	(L70B50>)20.000h


	CEE Energy classification	A++
---	----------------------------------	-----

References



	W	ϕ	ϕ_{LUM}	K	$\leftrightarrow$
237376	4W	$\geq 0,5$	403lm	2700K 2700K	35x35x123mm

Dimensions

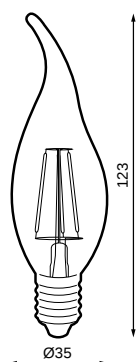

Photometry



Info



Hasta fin de existencias