




Applications



Classrooms



Retail



Home



Large surfaces
















Hotels



Restaurants


Specifications (Series luminaires)

 Voltage (V)	220-240V
Hz Frecuency (Hz)	50-60Hz
 Current (A)	1.050mA
ϕ Power factor (Cos fi)	0.96
 Dimming	No
 IP Tightness index	IP44
 Body color	White
 Diffuser Material	VT
 Body	AL
 Reflector	AL AN
K Colour temperature	4.000K





 Measures	Ø190x140mm
 Mounting position	Empotrar
 Inclination	50°/+135°/-135°
ϕ_{LUM} Flux (lm)	3.359lm
 Electrical isolation	CII
 Lifetime	L70>30.000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions

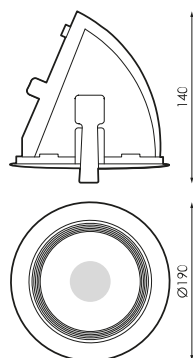

References

	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}		K	
237963	35W	38W	1050mA	4.046lm	3.359lm	100°	4.000K	Ø190x140mm

On request



Dali



Emergency kit



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description




Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.


Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive

Info	
Transparent glass with matte central section for an adequate glare control	