














Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	Hasta >0,5
	Dimming	No
	Bushing type	R7S
	IP Tightness index	IP20
K	Colour temperature	3.000K-5.000K
	CRI Colour rendering index	>80
	Opening angle	360°
	Measures	23,5x78mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	601lm
	Lifetime	(L70B50>) 40.000h
	CEE Energy classification	F

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
476744	6W	>0,5	598lm	3.000K	23,5x78mm
476751	6W	>0,5	601lm	5.000K	23,5x78mm

Dimensions

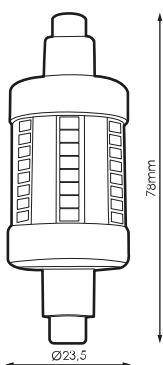

Photometry

