
























## Specifications (Series luminaires)


|   |                                   |                   |
|---|-----------------------------------|-------------------|
|    | <b>Electrical isolation</b>       | CII               |
|    | <b>Voltage (V)</b>                | 230V              |
| <b>Hz</b>   | <b>Frecuency (Hz)</b>             | 50-60Hz           |
|    | <b>Dimming</b>                    | No                |
|    | <b>IP Tightness index</b>         | IP65              |
|    | <b>IK Impact resistance</b>       | IK08              |
|    | <b>Body color</b>                 | Black             |
|    | <b>Diffuser Material</b>          | PC-O              |
|    | <b>Body</b>                       | PC                |
| <b>K</b>  | <b>Colour temperature</b>         | 4.000K            |
|  | <b>CRI Colour rendering index</b> | >80               |
|  | <b>Opening angle</b>              | 127°              |
|  | <b>Measures</b>                   | 271x46x72mm       |
|  | <b>Mounting position</b>          | Superficie        |
|  | <b>Operating temperature</b>      | -10°C~+35 °C      |
|  | <b>Flux (lm)</b>                  | 1.950lm           |
|  | <b>Lifetime</b>                   | (L70B50>) 25.000h |

**References**



|  | W   | $\phi_{LUM}$ | K      |  |  |  |  |  |
|---|-----|--------------|--------|---|---|---|---|---|
| <b>378055</b>   | 18W | 1.950lm      | 4.000K | Black   | >80   | (L70B50>)<br>25.000h  | 127°  | 271x46x72mm   |

**Dimensions**

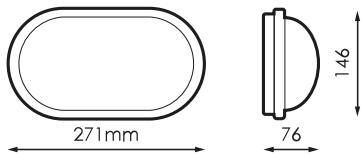

**Photometry**

