

Specifications (Series luminaires)



	Electrical isolation	CII
	Voltage (V)	180-250V
	Frecuency (Hz)	50-60Hz
	Dimming	No

	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Body	AL

	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Opening angle	120°

	Measures	225x225x30mm
	Mounting position	Empotrado Techo

	Operating temperature	-5°C~+35 °C
--	------------------------------	-------------

	Flux (lm)	2.303lm
--	------------------	---------

	Lifetime	(L70B50>) 50.000h
--	-----------------	-------------------



References




W	ϕ_{LUM}	K						
381390	20W	2.303lm	4.000K	>80	White	200 x 200	225x225x30m	No

Dimensions



Photometry

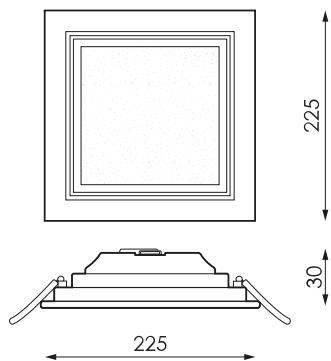



On request



Emergency kit 2h
Bajo el campo de configuración se añade solo este texto, en los 4 idiomas definidos



Dali



Accessories



387644

SURFACE
ACCESSORY SQ
KENTAU 20W WHITE



532181

DRIVER KENTAU
20W 1-10V



507325

DRIVER KENTAU
20W DALI



Technologies



CELLTECH



CELLTECH technology is a revolutionary feeding system for luminaires that allow the extraction and exchange of drivers that facilitates and simplifies the installation and mounting of luminaires. CELLTECH drivers are available without regulation and with 1-10V regulation and C-TOUCH.



S

Solutions



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es