





















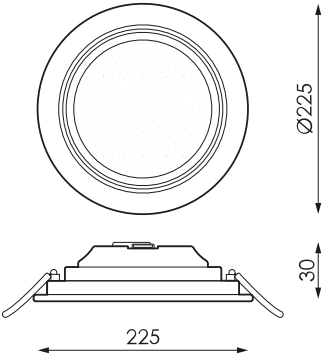




| Specifications (Series luminaires)  |                            |                  |
|---|----------------------------|------------------|
|    | Electrical isolation       | CII              |
|    | Voltage (V)                | 180V             |
|    | Frecuency (Hz)             | 50/60Hz          |
|    | Power factor (Cos fi)      | ≥0,9             |
|    | Dimming                    | No               |
|    | IP Tightness index         | IP20             |
|    | Diffuser Material          | PC-O             |
|    | Body                       | PC               |
|    | Colour temperature         | 3000K            |
|   | CRI Colour rendering index | >80              |
|  | Opening angle              | 120°             |
|  | Measures                   | 225x225x30mm     |
|  | Mounting position          | Empotrado Techo  |
|  | Operating temperature      | -                |
|  | Flux (lm)                  | 2,173lm          |
|  | Lifetime                   | (L70B50>)50.000h |
|  | Lifetime                   | (L70B50>)50.000h |

| References  |     |              |                |   |   |   |   |
|---|-----|--------------|----------------|---|---|---|---|
|  | W   | $\phi_{LUM}$ | K              |  |  |  |  |
| 381413  | 20W | 2173lm       | 3000K<br>3000K | 80  |   | 225x225x30mm  | No  |

| Dimensions   | Photometry |
|--|------------|
|  |            |

Solutions

S



CTE  
Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



You  
need

description



Need DALI driver



BLUETOOTH  
Pack

description




Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



You  
need

description



Info 

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)