



Specifications (Series luminaires)



	Electrical isolation	CII
	Voltage (V)	180V
	Frequency (Hz)	50-60Hz
	Power factor (Cos fi)	≥0,9
	Dimming	No

	IP Tightness index	IP20
	IP installed Sealing rating	IP40
	Diffuser Material	PC-O
	Body	PC

	Colour temperature	3000K
	CRI Colour rendering index	>80
	Opening angle	120°

	Measures	175x175x30mm
	Mounting position	Empotrado Techo

	Operating temperature	-
--	------------------------------	---

	Flux (lm)	1,516lm
--	------------------	---------

	Lifetime	(L70B50>)50.000h
--	-----------------	------------------




References

Reference	W	ϕ_{LUM}	K	Ψ	∞	\leftrightarrow	\odot
381468	14W	1516lm	3000K	>80		175x175x30mm	No

Dimensions



Photometry

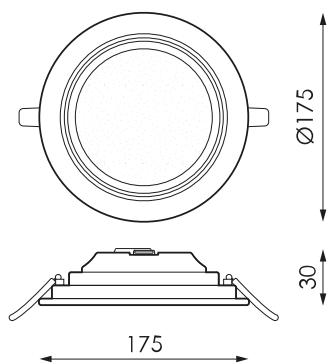



Solutions



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



You need

description



Need DALI driver



You need

description



Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es