













Specifications (Series luminaires)


| | | |
|---|-----------------------------------|-------------------|
|  | Voltage (V) | 12V acV |
| Hz | Frecuency (Hz) | 50-60Hz |
| Φ | Power factor (Cos fi) | >0,5 |
|  | Dimming | No |
|  | Bushing type | G4 |
|  | IP Tightness index | IP20 |
| K | Colour temperature | 2.700K |
|  | CRI Colour rendering index | >80 |
|  | Opening angle | 240° |
|  | Measures | 10x37mm |
|  | Operating temperature | -5°C~+35 °C |
| Φ_{LUM} | Flux (lm) | 155lm |
|  | Lifetime | (L70B50>) 30.000h |
|  | CEE Energy classification | E |

References



|  | W | ϕ | ϕ_{LUM} | K | \leftrightarrow |
|---|------|--------|--------------|--------|-------------------|
| 384193 | 1,5W | >0,5 | 155lm | 2.700K | 10x37mm |

Dimensions

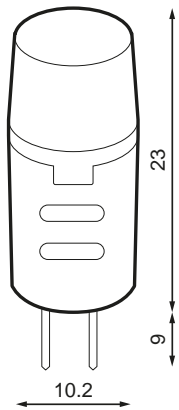

Photometry

