













Specifications (Series luminaires)




	Voltage (V)	12V acV
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	>0,5
	Dimming	No
	Bushing type	G4
	IP Tightness index	IP20
K	Colour temperature	4.200K
	CRI Colour rendering index	>80
	Opening angle	240°
	Measures	10x37mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	167lm
	Lifetime	(L70B50>) 30.000h
	CEE Energy classification	E

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
384209	1,5W	>0,5	167lm	4.200K	10x37mm

Dimensions

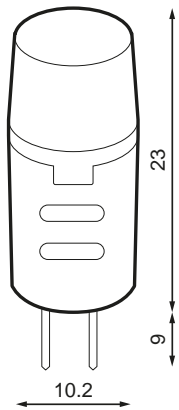

Photometry

