



Specifications (Series luminaires)

	Electrical isolation	CI
	Voltage (V)	230V
Hz	Frequency (Hz)	50/60Hz
	Power factor (Cos fi)	>0,5
	Dimming	No

	Bushing type	GU10
	IP Tightness index	IP20
	Body color	White

K	Colour temperature	4000K
	CRI Colour rendering index	>80
	Opening angle	100°

	Measures	50x50x58mm
---	-----------------	------------

	Operating temperature	-5°C ~ +35°C
---	------------------------------	--------------

	Flux (lm)	605lm
---	------------------	-------

	Lifetime	(L70B50>)25.000h
	Lifetime	(L70B50>)25.000h
	N° of ignitions	15.000

	CEE Energy classification	A+
---	----------------------------------	----


References					
	W	ϕ	ϕ_{LUM}	K	$\leftrightarrow$
386326	7W	>0,5	605lm	4000K 4000K	50x50x58mm

Dimensions



Photometry



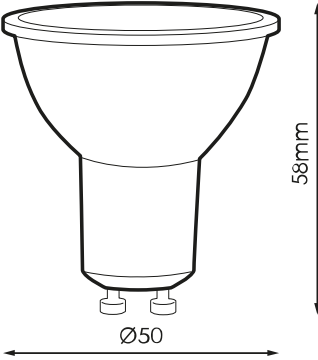

Accessories



974851

GU10/GZ10
LAMPHOLDER WITH
SILICONE CABLE