



Specifications (Series luminaires)

	Electrical isolation	CII
	Voltage (V)	180V
Hz	Frecuency (Hz)	50-60Hz
ϕ	Power factor (Cos fi)	$\geq 0,9$
	Dimming	No

	IP Tightness index	IP20
	IP installed Sealing rating	IP40
	Diffuser Material	PC-O
	Body	PC

K	Colour temperature	3000K
	CRI Colour rendering index	>80
	Opening angle	120°

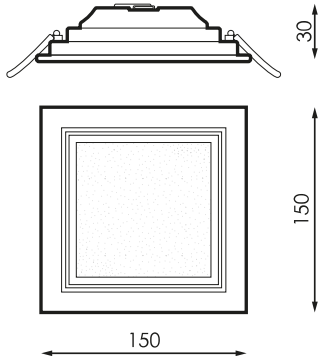
	Measures	150x150x30mm
	Mounting position	Empotrado Techo

	Operating temperature	-
---	-----------------------	---

ϕ_{LUM}	Flux (lm)	887lm
--------------	-----------	-------

	Lifetime	(L70B50>)50.000h
---	----------	------------------

References							
	W	ϕ_{LUM}	K				
387477	9W	887lm	3000K	>80		150x150x30mm	No

Dimensions	Photometry
	

Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.



You need

description



Need DALI driver



You need

description



Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es