





Applications



Offices



Classrooms



Cleanrooms



Retail



















Home



Health care


Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	350mA
	LED number	144
	Dimming	No
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	White
	Diffuser Material	PC-T
	Body	FE
	Reflector	AL
K	Colour temperature	4.000K
	CRI Colour rendering index	>80







	Measures	595x595x96mm
	Mounting position	Empotrar
	Flux (lm)	4.663lm
	Electrical isolation	CI
	Lifetime	L70>50.000h

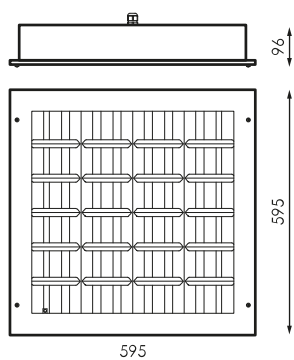Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

		W				K	
400268	4x13	54W	350mA	6.840lm	4.663lm	4.000K	595x595x96mm

Photometry

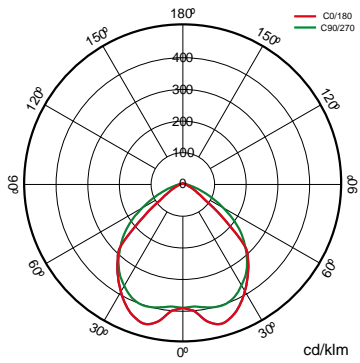

On request



Dali



Emergency kit

K

>80 3.000K

>80 4.000K

>80 4.000K

Accessories



150187

ACCES. ESCAYOLA
SILENT V 4X18W 4
CHA + TOR



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



Bluetooth package

description




Casambi version of our fixtures that enables through any Bluetooth® terminal via free APP that offers the control of flow regulation, color, scene configuration, behavior linked to schedules. Multiple accessories can be configured to work on the same network to unify the control of one or more spaces, being able to create groups, scenes and dynamic sequences to measure. The Bluetooth® device is valid for any DALI luminaire.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info 

You need DALI drive

Info



Hydrogen peroxide resistant polymeric finish