














Specifications (Series luminaires)




	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	>0,5
	Dimming	No
	Bushing type	GU10
	IP Tightness index	IP20
K	Colour temperature	4.000K
	CRI Colour rendering index	>80
	Opening angle	40°
	Measures	30,4x49mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	247lm
	Lifetime	(L70B50>) 25.000h
	CEE Energy classification	G

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
402088	2,5W	>0,5	247lm	4.000K	30,4x49mm

Dimensions

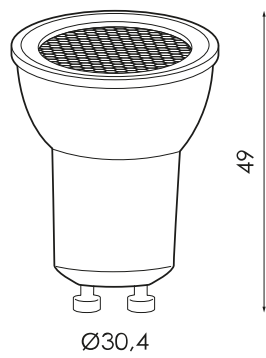

Photometry



Accessories



974851

GU10/GZ10
LAMPHOLDER WITH
SILICONE CABLE