





















### Specifications (Series luminaires)




	<b>Electrical isolation</b>	CCI
	<b>Voltage (V)</b>	12-24V
	<b>Power factor (Cos fi)</b>	≥0,5
	<b>Dimming</b>	No
	<b>Bushing type</b>	E27
	<b>IP Tightness index</b>	IP20
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	PC
	<b>Colour temperature</b>	4000K
	<b>CRI Colour rendering index</b>	80cromatica
	<b>Opening angle</b>	210°
	<b>Measures</b>	60x110mm
	<b>Flux (lm)</b>	805lm
	<b>Lifetime</b>	(L70B50>)25.000h
	<b>Lifetime</b>	(L70B50>)25.000h
	<b>N° of ignitions</b>	15.000
	<b>CEE Energy classification</b>	A+

## References



	W	$\phi$	$\phi_{LUM}$	K	$\leftrightarrow$
402163	8W	$\geq 0,5$	805lm	4000K	60x110mm

## Dimensions

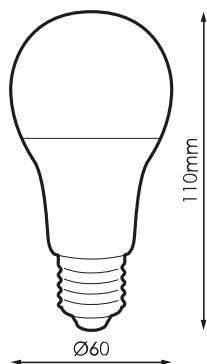

## Photometry

