













### Specifications (Series luminaires)



	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
$\phi$	<b>Power factor (Cos fi)</b>	>0,7
	<b>Dimming</b>	Yes
	<b>Bushing type</b>	E27
	<b>IP Tightness index</b>	IP20
K	<b>Colour temperature</b>	2.500K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	280°
	<b>Measures</b>	95x143mm
	<b>Operating temperature</b>	-5°C~+35 °C
$\phi_{LUM}$	<b>Flux (lm)</b>	463lm
	<b>Lifetime</b>	(L70B50>) 15.000h
	<b>CEE Energy classification</b>	F




### References



	W	$\phi$	$\phi_{LUM}$	K	$\leftrightarrow$
<b>402194</b>	4W	>0,7	463lm	2.500K	95x143mm

### Dimensions

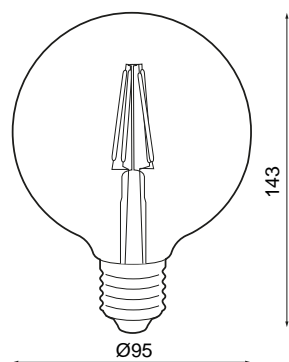

### Photometry

