Sura
410076

PRILUX



Specifications (Series luminaires)

Electrical isolation	CI
Voltage (V)	100-240V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	≥0,5
Dimming	No
IP Tightness index	IP65
IK Impact resistance	IK08
Diffuser Material	VT
Colour temperature	3000K
CRI Colour rendering index	>80
Opening angle	77°
Measures	125x60x56mm
Mounting position	Surface Side
Operating temperature	-
Flux (lm)	454lm
Guarantee	3garantia
Lifetime	(L70B50>)40.000H

11/11/2026


Sura
410076

PRILUX

References

	W	Φ_{LUM}	K					
410076	7W	454lm	3000K		>80	(L70B50>)40.000H	77°	125x60x56mm

Dimensions

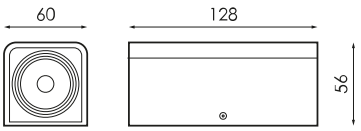

Photometry

