













### Specifications (Series luminaires)

	<b>Electrical isolation</b>	CI
	<b>Voltage (V)</b>	100-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	≥0,5
	<b>Dimming</b>	No

	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK08
	<b>Diffuser Material</b>	VT
	<b>Body</b>	Al

<b>K</b>	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	≥80
	<b>Opening angle</b>	77°

	<b>Measures</b>	60x128x56mm
	<b>Mounting position</b>	Superficie Lateral







	<b>Operating temperature</b>	-10 +35
-------------------------------------------------------------------------------------	------------------------------	---------

	<b>Flux (lm)</b>	488lm
-------------------------------------------------------------------------------------	------------------	-------

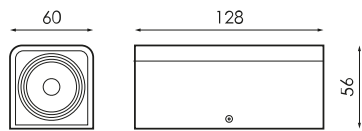
	<b>Lifetime</b>	(L70B50>) 40.000h
-------------------------------------------------------------------------------------	-----------------	-------------------

**References**



		W	$\phi_{LUM}$	K				
<b>410083</b>	Directo	7W	488lm	4.000K	$\geq 80$	(L70B50>) 40.000h	77°	60x128x56mm

**Dimensions**



**Photometry**

