



Applications



Fairgrounds



Facades


















Historic buildings



Cultural spaces

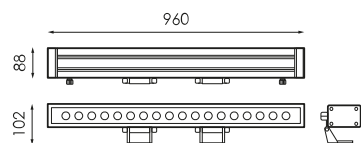
Specifications (Series luminaires)

 Voltage (V)	100-240V
Hz Frecuency (Hz)	50-60Hz
 LED number	18
 Dimming	No
 IP Tightness index	IP66
 IK Impact resistance	IK09
 Body color	9007
 Diffuser Material	VT
 Body	AL
K Colour temperature	3.000K
 CRI Colour rendering index	>80




 Measures	960x102x88mm
 Operating temperature	-20°C a +35°C
 Surges protection	No
 Flux (lm)	2.273lm
 Electrical isolation	CI
 Lifetime	L70>30000h

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.

Dimensions



References

	W_{LED}	W	ϕ_{LED}	ϕ_{LUM}		
410137	37W	40W	2803lm	2.273lm	18	No

Photometry

