Softline
441919

PRILUX



Specifications (Series luminaires)

Electrical isolation	CI
Voltage (V)	230V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	≥0,9
IP Tightness index	IP20
IP installed Sealing rating	-
Body color	White
Diffuser Material	PC-O
Body	PC
Colour temperature	4000K
CRI Colour rendering index	>80
Opening angle	120°
Measures	1.213x120x31mm
Linkable	No
Operating temperature	-
Flux (lm)	5,429lm
Lifetime	(L70B50>)25.000H


Softline
441919

PRILUX

References

	W	Φ_{LUM}	K			
441919	25W	5429lm	4000K	White	1.213x120x31mm	No

Dimensions

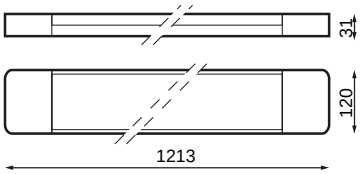

Photometry

Info

No apto para su exposición a rayos uva.