


















Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50Hz
Φ	Power factor (Cos fi)	$\geq 0,9$
	Dimming	No
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-T
	Body	PC
K	Colour temperature	3.000K
	CRI Colour rendering index	≥ 80
	UGR	<19
	Measures	250x250x33mm
	Mounting position	Superficie
	Operating temperature	-5 +35
Φ_{LUM}	Flux (lm)	1376lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h

References



	W_{LED}	W	ϕ	ϕ_{LED}	ϕ_{LUM}	K	
446525	10W	12W	$\geq 0,9$	1564lm	1376lm	3.000K	No

Dimensions

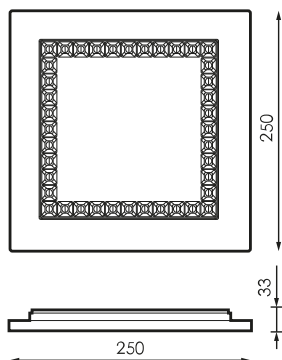

Photometry

