


MADE IN SPAIN  
Design by PRILUX



## Applications

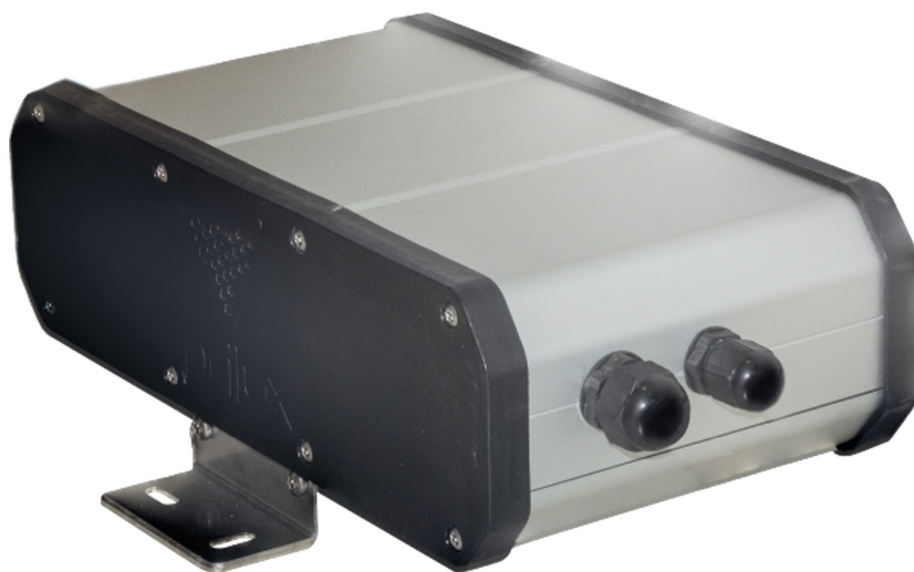

Monuments



Fairgrounds



Facades



Historic buildings







Cultural spaces



## Specifications (Series luminaires)








	<b>Voltage (V)</b>	220-240V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Current (A)</b>	700mA
$\phi$	<b>Power factor (Cos fi)</b>	0.98
	<b>Dimming</b>	DMX

	<b>Measures</b>	452x321x174mm
---	-----------------	---------------

	<b>Surges protection</b>	Si
---	--------------------------	----

	<b>Electrical isolation</b>	CI
---	-----------------------------	----


	<b>IP Tightness index</b>	IP66
	<b>IK Impact resistance</b>	IK10
	<b>Body color</b>	9007
	<b>Diffuser Material</b>	PC-T
	<b>Body</b>	AL iap

	<b>Lifetime</b>	L90B10>184.000h
---	-----------------	-----------------

K	<b>Colour temperature</b>	RGBW(W:4000K)
	<b>CRI Colour rendering index</b>	>80 (Blanco)





Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.
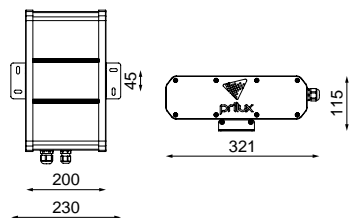
## Dimensions




## References



		W		
452663	1x	94W	700mA	Yes

## Photometry

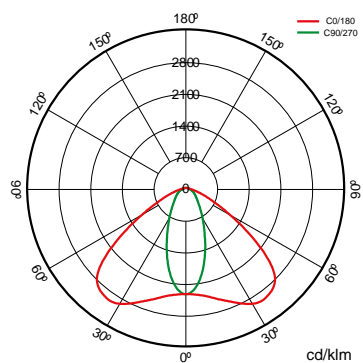

## On request



Bluetooth

## Accessories



**452670**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 3MTS



**452687**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 5MTS



**471428**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 7MTS



**471596**

KIT CONEXION  
HEXAGON REMOTO  
RGBW 10MTS



## Technologies



Temperature evacuation skin system



### TESS



The TESS (Temperature Evacuation Skin System) surface treatment technology is based on a mechanical microcompaction of the material surface that enhances thermal dissipation, improving the results obtained with lacquer-based surface treatments.



### Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

### Warning



You need DALI drive



## Solutions

S



### Cora Sport

#### description



CORA SPORTS is the family of devices by Priluxto control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)