














## Specifications (Series luminaires)

	<b>Electrical isolation</b>	CII
	<b>Voltage (V)</b>	220-240V
<b>Hz</b>	<b>Frecuency (Hz)</b>	50-60Hz
	<b>Power factor (Cos fi)</b>	>0,5
	<b>Dimming</b>	No

	<b>IP Tightness index</b>	IP54
	<b>Diffuser Material</b>	PC-O
	<b>Body</b>	ABS

<b>K</b>	<b>Colour temperature</b>	3.000K
	<b>CRI Colour rendering index</b>	>80
	<b>Opening angle</b>	120°

	<b>Measures</b>	Ø260x84mm
	<b>Mounting position</b>	Superficie

	<b>Flux (lm)</b>	1.087lm
---	------------------	---------

	<b>Lifetime</b>	(L70B50>) 25.000h
---	-----------------	-------------------




References



		W	$\phi_{LUM}$	K				
468589	L	15W	1.087lm	3.000K	>80	(L70B50>) 25.000h	120°	Ø260x84mm

Dimensions

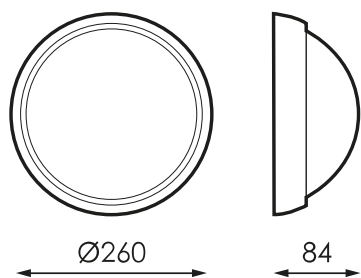

Photometry

