Masne
468701

PRILUX



Specifications (Series luminaires)

Electrical isolation	CII
Voltage (V)	220-240V
Power factor (Cos fi)	≥0,5
Dimming	No
IP Tightness index	IP54
Diffuser Material	PC-O
Body	ABS
Colour temperature	3000K
CRI Colour rendering index	>80
Opening angle	120°
Measures	170x17x57mm
Operating temperature	-
Flux (lm)	586lm
Guarantee	2garantia
Lifetime	(L70B50>)25.000H


Masne
468701

PRILUX

References

	W	Φ_{LUM}	K					
468701	8W	586lm	3000K		>80	(L70B50>)25.000H	120°	170x17x57mm

Dimensions

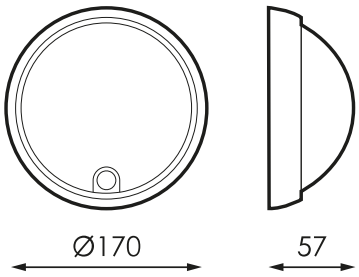

Photometry