






















## Specifications (Series luminaires)




	<b>Voltage (V)</b>	100-240V
	<b>Current (A)</b>	2.000mA
	<b>Power factor (Cos fi)</b>	≥0,9
	<b>Dimming</b>	1-10V
	<b>IP Tightness index</b>	IP65
	<b>IK Impact resistance</b>	IK08
	<b>Body color</b>	Black
	<b>Diffuser Material</b>	VT
	<b>Body</b>	AL
<b>K</b>	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	≥80
	<b>Measures</b>	Ø220x171,4mm
	<b>Weight</b>	2.2Kg
	<b>Operating temperature</b>	-30 +35
	<b>Flux (lm)</b>	13118lm
	<b>Electrical isolation</b>	CI
	<b>Lifetime</b>	(L70 B50>)50.000h

**References**



	$W_{LED}$	W		$\phi_{LED}$	$\phi_{LUM}$	$\Delta$	K		
<b>468961</b>	90W	100W	2000mA	13996lm	13118lm	120°	4.000K	≥80	Ø220x171,4m

**Dimensions**

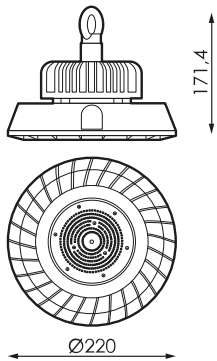

**Photometry**



---

**On request**

---



50°-90° Polycarbonate Optic

50°-90° Polycarbonate Optic

---

---

**Accessories**

---



---

**507578**

---

REMOTE CONTROL  
HIGH HEIGHT  
MOTION DETECTOR

**Info**



Reflector mounting results in a 4% reduction in flow. This product is served with 2 built-in 250 mm hoses.