





















Specifications (Series luminaires)


	Voltage (V)	100-240V
	Current (A)	2.900mA
	Power factor (Cos fi)	≥0,9
	Dimming	1-10V
	IP Tightness index	IP65
	IK Impact resistance	IK08
	Body color	Black
	Diffuser Material	VT
	Body	AL
K	Colour temperature	5.000K
	CRI Colour rendering index	≥80
	Measures	Ø330x171,5mm
	Weight	3.7Kg
	Operating temperature	-30 +35
	Flux (lm)	21007lm
	Electrical isolation	CI
	Lifetime	(L70 B50>)50.000h

References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K		\leftrightarrow
468992	141W	150W	2900mA	21893lm	21007lm	120°	5.000K	≥80	Ø330x171,5m

Dimensions

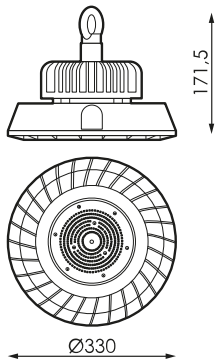

Photometry



On request



50°-90° Polycarbonate Optic

50°-90° Polycarbonate Optic

Accessories



507578

REMOTE CONTROL
HIGH HEIGHT
MOTION DETECTOR

Info



Reflector mounting results in a 4% reduction in flow. This product is served with 2 built-in 250 mm hoses.