

























Specifications (Series luminaires)


	Voltage (V)	220-240V
	Frecuency (Hz)	Hz
	Current (A)	2.280mA
	Power factor (Cos fi)	≥0,9
	Dimming	DALI
	IP Tightness index	IP65
	IK Impact resistance	IK10
	Body color	Black
	Diffuser Material	PC
	Body	AL
	Colour temperature	5.000K
	CRI Colour rendering index	≥80
	Measures	Ø300x167mm
	Weight	3.95Kg
	Operating temperature	-30 +35
	Flux (lm)	13985lm
	Electrical isolation	CI
	Lifetime	(L70 B50>)50.000h

References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	Δ	K		
469395	92W	100W	2280mA	14877lm	13985lm	120°	5.000K	≥80	Ø300x167m m

Dimensions

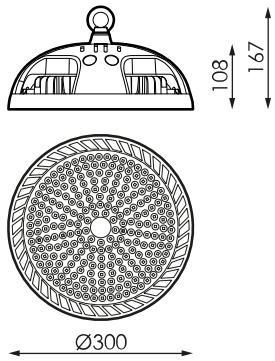

Photometry



On request



Emergency kit 2hBajo el campo de configuración se añade solo este texto, en los 4 idiomas definidos



50°-90° Polycarbonate Optic

60°-90° Polycarbonate Optic



Bluetooth



Cora Industry

description



The CORA device in its three versions; INDUSTRY UNIT, INDUSTRY and CORA INDUSTRY MASTER controls the lighting of new or even existing installations thanks to wireless technology such as BLUETOOTH 5.0

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



Reflector mounting results in a 4% reduction in flow. This product is served with 2 built-in 250 mm hoses.