














## Specifications (Series luminaires)


	<b>Voltage (V)</b>	230V
Hz	<b>Frecuency (Hz)</b>	50-60Hz
$\Phi$	<b>Power factor (Cos fi)</b>	>0,9
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP20
	<b>IP installed Sealing rating</b>	40
	<b>Body color</b>	White
	<b>Diffuser Material</b>	PMMA P
	<b>Body</b>	FE
K	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	>80
	<b>UGR</b>	<19
	<b>Measures</b>	600x600mm
	<b>Mounting position</b>	Empotrar
$\Phi_{LUM}$	<b>Flux (lm)</b>	4.026lm
	<b>Electrical isolation</b>	CII
	<b>Lifetime</b>	(L70B50>) 50.000h

## References




	$W_{LED}$	W		$\phi$	$\phi_{LED}$	$\phi_{LUM}$	K		
<b>470742</b>	40W	36W	1000mA	>0,9	4.953lm	4.026lm	4.000K	575 x 575	No

## Dimensions

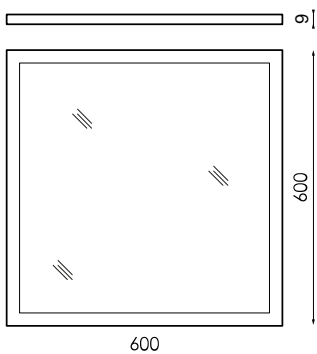

## Photometry

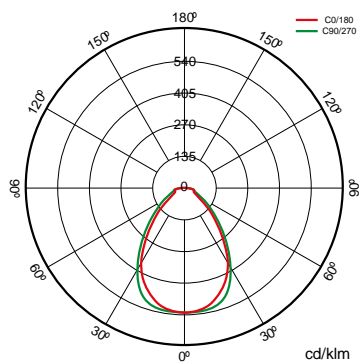



## On request



Emergency kit 1h



Dali-Bluetooth

## Accessories



**964562**

FRAME WH  
RECESSED PLASTER  
SILENT LED 60X60CM



**164092**

WH SURFACE  
DRAWER SILENT  
LED 60X60CM



**207638**

TRANS POWER  
CABLE 3X0.75 1M 1PC



**472500**

SUSPENSION KIT  
1.5M SILENT LED (4  
UNITS)



**397391**

RECESSED CEILING  
FRAME HIDDEN  
PROFILE SILENT I  
60X60



**537933**

ADJUSTABLE  
POWER CABLE  
TRANS 5X0.75 1M 1PC



## Solutions

S



### CTE Pack

#### description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



### CLASSROOMS Pack

#### description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



### BLUETOOTH Pack

#### description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

#### Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web [www.prilux.es](http://www.prilux.es)

## Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.