
















## Specifications (Series luminaires)


|   |                                   |                 |
|---|-----------------------------------|-----------------|
|    | <b>Electrical isolation</b>       | CIII            |
|    | <b>Voltage (V)</b>                | 3,7V            |
|    | <b>Dimming</b>                    | No              |
|    | <b>IP Tightness index</b>         | IP65            |
|    | <b>Body color</b>                 | Black           |
|    | <b>Body</b>                       | ABS             |
| <b>K</b>  | <b>Colour temperature</b>         | 4.000K          |
|    | <b>CRI Colour rendering index</b> | ≥80             |
|    | <b>Opening angle</b>              | 90°             |
|  | <b>Measures</b>                   | 221x140x109,2mm |
|  | <b>Mounting position</b>          | Superficie      |
|  | <b>Operating temperature</b>      | -5 +35          |
|  | <b>Flux (lm)</b>                  | 400lm           |
|  | <b>Lifetime</b>                   | 25.000h         |

## References




|               | W    | $\phi_{LUM}$ | K      |       |           |         |     |                     |
|---------------|------|--------------|--------|-------|-----------|---------|-----|---------------------|
| <b>472142</b> | 3,2W | 400lm        | 4.000K | Black | $\geq 80$ | 25.000h | 90° | 221x140x109,2<br>mm |

## Dimensions

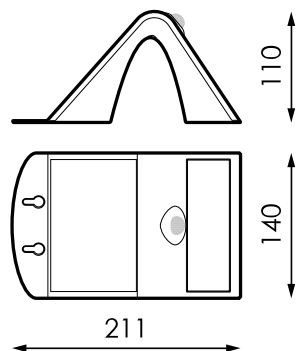

## Photometry



|   |   |
|---|---|
| <b>Info</b>                                 |  |
| Replaceable battery in 3,2W and 6,8W models |   |