
















## Specifications (Series luminaires)

	<b>Electrical isolation</b>	CIII
	<b>Voltage (V)</b>	3,7V
	<b>Dimming</b>	No
	<b>IP Tightness index</b>	IP65
	<b>Body color</b>	Grey
	<b>Body</b>	ABS
<b>K</b>	<b>Colour temperature</b>	4.000K
	<b>CRI Colour rendering index</b>	≥80
	<b>Opening angle</b>	90°
	<b>Measures</b>	221x270x109,2mm
	<b>Mounting position</b>	Superficie
	<b>Operating temperature</b>	-5 +35
	<b>Flux (lm)</b>	800lm
	<b>Lifetime</b>	25.000h




## References




	W	$\phi_{LUM}$	K					
<b>472241</b>	6,8W	800lm	4.000K	Gray	$\geq 80$	25.000h	90°	221x270x109,2 mm

## Dimensions

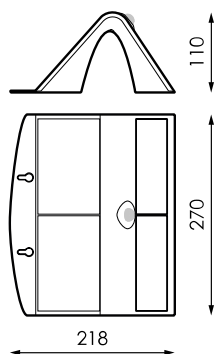

## Photometry



<b>Info</b>	
Replaceable battery in 3,2W and 6,8W models	