Silent Led I Ugr

478052

PRILUX

Specifications (Series luminaires)

Voltage (V)	220-240V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	≥0,9
Dimming	No
IP Tightness index	IP20
Body color	White
Diffuser Material	PMMA-P
Body	FE
Colour temperature	3000K
CRI Colour rendering index	>80
Measures	1.200x300x1.200mm
Mounting position	Empotrado Techo
Operating temperature	-
Flux (lm)	3,618lm
Electrical isolation	CII
Lifetime	(L70B50>)50.000h
Lifetime	(L70B50>)50.000h

Silent Led I Ugr

478052

PRILUX

References

	W_{LED}	W		φ	ϕ_{LED}	ϕ_{LUM}	K	
478052	36W	40W	1000mA	≥0,9	4316lm	3618lm	3000K	No

Dimensions

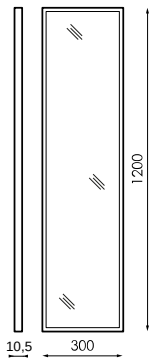

Photometry

Info

Necesita driver DALI

Accessories



964562

FRAME WH RECESSED PLASTER SILENT LED 60X60CM

207591

FRAME BL RECESS PLASTER SILENT LED 120X30CM

164092

WH SURFACE DRAWER SILENT LED 60X60CM

207874

WH SURFACE DRAWER SILENT LED 120X30CM

397391

RECESSED CEILING FRAME HIDDEN PROFILE SILENT I 60X60

384070

WH FRAME RECESS PLASTER SILENT LED 120X60CM

383806

WH SURFACE DRAWER SILENT LED 120X60CM

484039

WH SURFACE DRAWER SILENT LED I 30X120X4,8CM DES

Solutions

S

CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.

BLUETOOTH Pack

description

Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es