





















Specifications (Series luminaires)


	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Dimming	No
	IP Tightness index	IP20
	IP installed Sealing rating	40
	Body color	White
	Diffuser Material	PMMA P
	Body	FE
K	Colour temperature	4.000K
	CRI Colour rendering index	>80
	UGR	<19
	Measures	300x1.200mm
	Mounting position	Empotrar
	Flux (lm)	4.026lm
	Electrical isolation	CII
	Lifetime	(L70B50>) 50.000h

References



	W_{LED}	W		ϕ_{LED}	ϕ_{LUM}	K		
478069	40W	36W	1000mA	4.953lm	4.026lm	4.000K	275 x 1.175	No

Dimensions

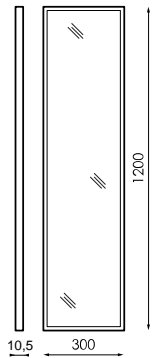

Photometry



On request



Emergency kit 1h



Dali-Bluetooth

Accessories



207591

FRAME BL RECESS
PLASTER SILENT LED
120X30CM




207874

WH SURFACE
DRAWER SILENT
LED 120X30CM



207638

TRANS POWER
CABLE 3X0.75 1M 1PC



472500

SUSPENSION KIT
1.5M SILENT LED (4
UNITS)



484039

WH SURFACE
DRAWER SILENT
LED I 30X120X4,8CM
DES



484008

WH FRAME
RECESSED SILENT
LED I 30X120X4.8CM
DES



537933

ADJUSTABLE
POWER CABLE
TRANS 5X0.75 1M 1PC



Solutions

S



CTE Pack

description



Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.



CLASSROOMS Pack

description



Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.



BLUETOOTH Pack

description



Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es

Info



UGR <19 with R(%):70/70/30,S(m2)<36 y h(m)≥2,8.