



MADE IN SPAIN
Design by PRILUX



Applications



Monuments



Fairgrounds



Facades





















Historic buildings



Cultural spaces


Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	1.400mA
ϕ	Power factor (Cos fi)	0.98
	LED number	12
	Dimming	No
	IP Tightness index	IP67
	IK Impact resistance	IK10
	Body color	9007
	Body	FE
K	Colour temperature	4.000K
	CRI Colour rendering index	>70
	Optical	S093L0P






	Measures	215x140x120mm
	Weight	1.8Kg
	Wind Resistance	0,018m2
	Operating temperature	-40~+40°C
	Surges protection	Si
	Flux (lm)	6.247lm
	Electrical isolation	CI
	Lifetime	L90B10>200.000h

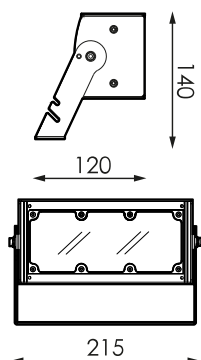Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions



References

	W_{LED}		ϕ_{LED}	ϕ_{LUM}			
478281	52 máx.	1400mA	6.892lm	6.247lm	12	TAAQ-S093L0P	No

Photometry

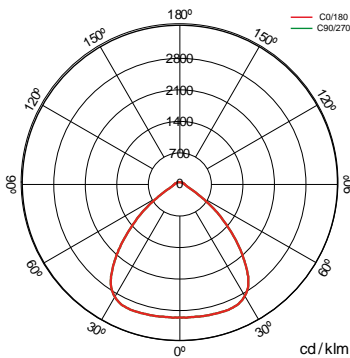

On request



K
>70 3.000K
>70 5.000K
>80 3.000K
>80 4.000K
>80 4.000K

Accessories



480246

ACCES. GRID
PARALUMEN TANEK
ARQ



480253

ACCES. VERTICAL
PARALUMEN TANEK
ARQ



480307

ACCESS. 3P TANEK
ARCH CONNECTOR



480291

ACCESS. 2P TANEK
ARCH CONNECTOR



480260

CONNECTION KIT
TANEK ARCH
REMOTE 5M



480277

TANEK ARCH
REMOTE
CONNECTION KIT
10M



480284

TANEK ARCH
REMOTE
CONNECTION KIT
20M



480635

ACCES. SOPORTE
BOX TANEK ARQ
REMOTO

Technologies



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



The RSSY remote installation systems are indivisibly composed of HEXAGON RSSY floodlights connected to a POWER BOX(not included in the luminaire). The POWER BOX must be purchased separately. Check with your local sales representative for the best combination adapted to your installation.