




MADE IN SPAIN
Design by PRILUX



Applications

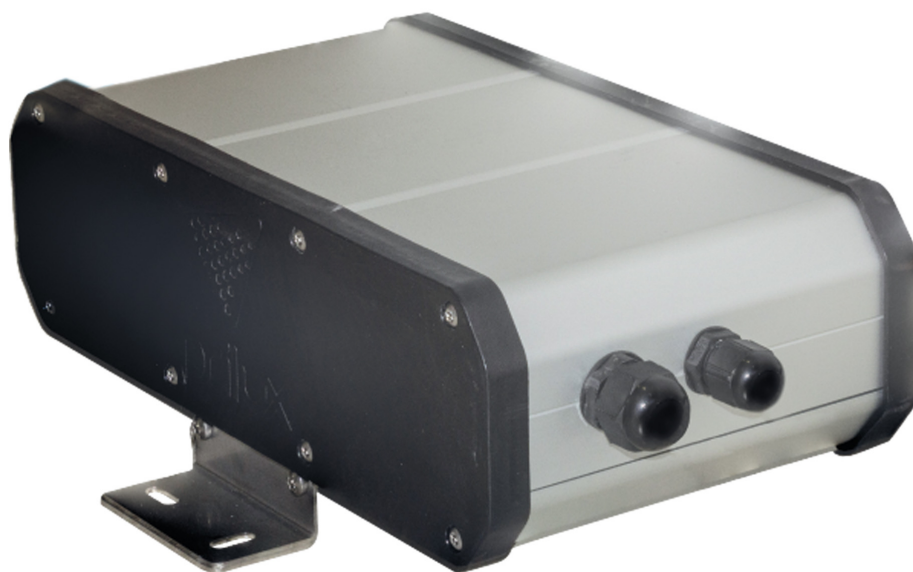

Monuments



Fairgrounds



Facades












Historic buildings




Cultural spaces

Specifications (Series luminaires)

	Voltage (V)	220-240V
Hz	Frecuency (Hz)	50-60Hz
	Current (A)	700mA
	Power factor (Cos fi)	0.98
	Dimming	DMX

	IP Tightness index	IP66
	IK Impact resistance	IK10
	Body color	9007
	Diffuser Material	PC-T
	Body	AL iap

K	Colour temperature	RGBW(W:4000K)
	CRI Colour rendering index	>80 (Blanco)

	Measures	350x321x115mm
---	-----------------	---------------


	Surges protection	Si
---	--------------------------	----

	Electrical isolation	CI
---	-----------------------------	----

	Lifetime	L90B10>184.000h
---	-----------------	-----------------

Prilux guarantees a $\pm 10\%$ tolerance in light flux measurements.


Dimensions




References

		W		
480079	2x	188W	700mA	Yes

Photometry

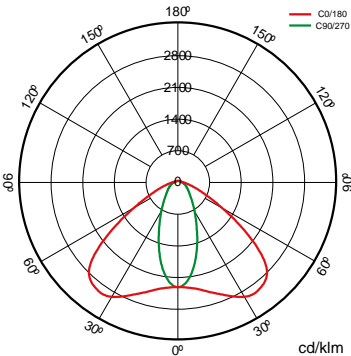

On request

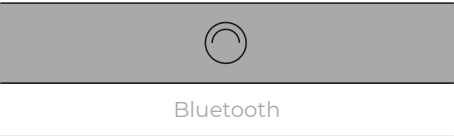

Accessories



452670

KIT CONEXION
HEXAGON REMOTO
RGBW 3MTS



452687

KIT CONEXION
HEXAGON REMOTO
RGBW 5MTS



471428

KIT CONEXION
HEXAGON REMOTO
RGBW 7MTS



471596

KIT CONEXION
HEXAGON REMOTO
RGBW 10MTS

Technologies



Temperature evacuation skin system



TESS



The TESS (Temperature Evacuation Skin System) surface treatment technology is based on a mechanical microcompaction of the material surface that enhances thermal dissipation, improving the results obtained with lacquer-based surface treatments.



Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

Warning



You need DALI drive

Solutions

S



Cora Sport

description



CORA SPORTS is the family of devices by Priluxto control DALI light fixtures in new or existing installations, indoors or outdoors, using Bluetooth5.0 wireless technology. Technology that is more efficient and easier to deploy and scale for professional lighting applications. It can work in a meshed arrangement with the light fixtures and to create smart communication networks. Especially recommended in installations with towers and/or groups of light fixtures to make it possible to operate them as a group or individually.

Info



For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es