



















### Specifications (Series luminaires)

|   |                                   |                  |
|---|-----------------------------------|------------------|
|    | <b>Electrical isolation</b>       | CCI              |
|    | <b>Voltage (V)</b>                | 230V             |
| <b>Hz</b>   | <b>Frecuency (Hz)</b>             | 50-60Hz          |
|    | <b>Power factor (Cos fi)</b>      | ≥0,5             |
|    | <b>Dimming</b>                    | No               |
|    | <b>Bushing type</b>               | E27              |
|    | <b>IP Tightness index</b>         | IP20             |
|    | <b>Body color</b>                 | White            |
|    | <b>Diffuser Material</b>          | PC-O             |
|    | <b>Body</b>                       | PC               |
| <b>K</b>  | <b>Colour temperature</b>         | 4000K            |
|  | <b>CRI Colour rendering index</b> | 80cromatica      |
|  | <b>Opening angle</b>              | 270°             |
|  | <b>Measures</b>                   | 38x109mm         |
|  | <b>Flux (lm)</b>                  | 978lm            |
|  | <b>Lifetime</b>                   | (L70B50>)40.000h |
|  | <b>Lifetime</b>                   | (L70B50>)40.000h |
|  | <b>CEE Energy classification</b>  | A+               |




### References



|        | W  | $\phi$     | $\phi_{LUM}$ | K     | $\leftrightarrow$ |
|--------|----|------------|--------------|-------|-------------------|
| 481359 | 9W | $\geq 0,5$ | 978lm        | 4000K | 38x109mm          |

### Dimensions

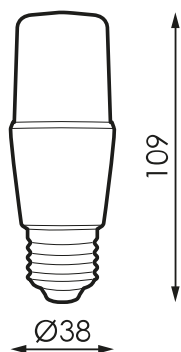

### Photometry

