



















Specifications (Series luminaires)


	Electrical isolation	CCI
	Voltage (V)	230V
Hz	Frecuency (Hz)	50-60Hz
	Power factor (Cos fi)	≥0,5
	Dimming	No
	Bushing type	E27
	IP Tightness index	IP20
	Body color	White
	Diffuser Material	PC-O
	Body	PC
K	Colour temperature	5000K
	CRI Colour rendering index	80cromatica
	Opening angle	270°
	Measures	65x150mm
	Flux (lm)	1563lm
	Lifetime	(L70B50>)40.000h
	Lifetime	(L70B50>)40.000h
	CEE Energy classification	A+

References



	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
481410	15W	$\geq 0,5$	1563lm	5000K	65x150mm

Dimensions

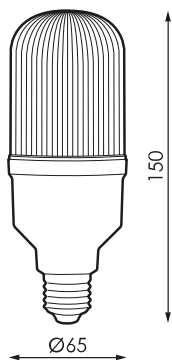

Photometry

