Breno Sq
483193

PRILUX



Specifications (Series luminaires)

Electrical isolation	CII
Voltage (V)	230V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	≥0,9
Dimming	No

IP Tightness index	IP20
IP installed Sealing rating	-
Body color	White
Diffuser Material	PC-O
Body	AL

Colour temperature	3000K
CRI Colour rendering index	>80
Opening angle	120°

Measures	225x225x39mm

Operating temperature	-

Flux (lm)	1,385lm

Guarantee	3garantia
Lifetime	(L70B50>)35.000H

11/11/2026


Breno Sq
483193

PRILUX


References

	W	Φ_{LUM}	K				
483193	18W	1385lm	3000K	>80	White	225x225x39mm	No

Dimensions

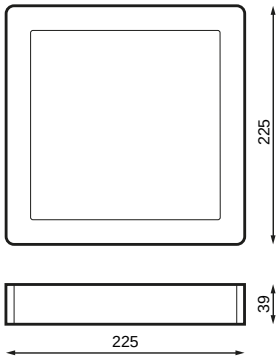

Photometry

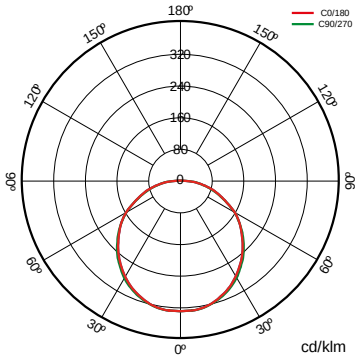

Solutions

CTE Pack

description

Regulation for the contribution of natural light to comply with the requirements of the CTE. Independent control of two lines of dimmable DALI luminaires with sensor to install in a luminaire or surface box. Preconfigured for easy operation.

CLASSROOMS Pack

description

Regulation by contribution of natural light and stand alone presence. Lighting control system to meet CTE requirements and optimize energy use by taking advantage of natural light and automatic shutdown in case of absence.

BLUETOOTH Pack

description

Device that enables DALI luminaire control through any Bluetooth® terminal via free APP that offers us control of flow regulation, color, scene configuration, behavior linked to schedules.

You need

description

Need DALI driver

You need

description

Info

For more information on the different solutions compatible with this luminaire, consult the following BIDI codes or on the web www.prilux.es