Norba
483506



Specifications (Series luminaires)

Electrical isolation	CII
Voltage (V)	220-240V
Frecuency (Hz)	50/60Hz
Power factor (Cos fi)	≥0,9
Dimming	No

IP Tightness index	IP20
IP installed Sealing rating	-
Body color	White
Diffuser Material	PC-O
Body	AL

Colour temperature	3000K
CRI Colour rendering index	>80
Opening angle	25°

Measures	170x170x98mm
Inclination	24°

Operating temperature	-

Flux (lm)	2,779lm

Guarantee	2garantia
Lifetime	(L70B50>)25.000H


Norba
483506

PRILUX

References

	W	Φ_{LUM}	K				
483506	30W	2779lm	3000K	>80	White	170x170x98mm	No

Dimensions

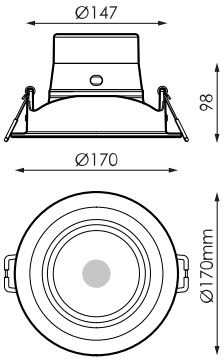

Photometry