



## Applications



Fairgrounds












Facades






Historic buildings



Cultural spaces


## Specifications (Series luminaires)

	<b>Voltage (V)</b>	24 dcV
Hz	<b>Frecuency (Hz)</b>	50-60Hz
	<b>LED number</b>	18
	<b>Dimming</b>	DMX
	<b>IP Tightness index</b>	IP66
	<b>IK Impact resistance</b>	IK09
	<b>Body color</b>	9007
	<b>Diffuser Material</b>	VT
	<b>Body</b>	AL
K	<b>Colour temperature</b>	RGBW
	<b>CRI Colour rendering index</b>	>80 (Blanco)

	<b>Measures</b>	1.000x76,5mm
	<b>Surges protection</b>	Si
	<b>Flux (lm)</b>	1.016lm
	<b>Electrical isolation</b>	CIII
	<b>Lifetime</b>	L70>50.000h

Prilux guarantees a  $\pm 10\%$  tolerance in light flux measurements.


## Dimensions



## References

	$W_{LED}$	$\phi_{LED}$	$\phi_{LUM}$		
490153	24W	1.471lm	1.016lm	18	Yes

## Photometry

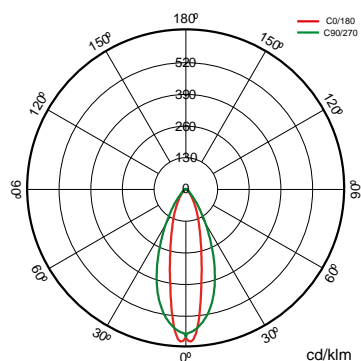

## Accessories



**516013**

CONECTOR T DMX  
LED PAD AVANT  
RGBW



**516020**

EXTENSION 3M 5PIN  
DMX LED PAD  
AVANT RGBW



**391535**

EXTENSION FUENTE  
DE ALIMENTACION  
0,5 BL



**588911**

EXTENSION FUENTE  
DE ALIMENTACION  
0,5 NG

## Accessories



**588928**

EXTENSION FUENTE  
DE ALIMENTACION  
1M NG



**529327**

EXTENSION 0.5M  
5PIN DMX LED PAD  
AVANT RGBW



**565325**

TAPON FINAL  
ALUMINIO LED PAD  
AVANT RGBW



**588942**

POWER SUPPLY  
EXTENSION 5M NG



---

## Technologies

---



### Overstorm

---

#### Overstorm



OVERSTORM technology is designed for those luminaires that normally face electrically aggressive environments. It provides the product with three spheres of protection: In the outer sphere, an independent surge protector suppresses eventual voltage surges, in the intermediate sphere the drivers are prepared to withstand voltage peaks of up to 6 kV and 10kV. In the nuclear sphere, the protection in the LED module is provided both at its input, for small surges that have not been filtered by the external spheres.

---

---

#### Rules



Without remote control. RGB with memory effect.

## Info



Do not connect more than 8 luminaires in series