














Specifications (Series luminaires)

	Voltage (V)	12V acV
Hz	Frecuency (Hz)	50-60Hz
Φ	Power factor (Cos fi)	>0,9
	Dimming	No
	Bushing type	G53
	IP Tightness index	IP20
K	Colour temperature	3.000K
	CRI Colour rendering index	>80
	Opening angle	24°
	Measures	111x67mm
	Operating temperature	-5°C~+35 °C
Φ_{LUM}	Flux (lm)	792lm
	Lifetime	(L70B50>) 30.000h
	CEE Energy classification	G

References

	W	ϕ	ϕ_{LUM}	K	\leftrightarrow
497640	12W	>0,9	792lm	3.000K	111x67mm

Dimensions

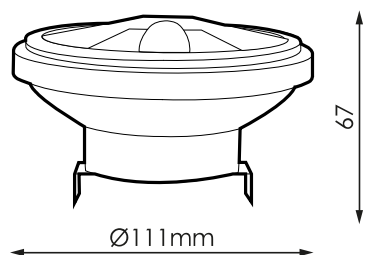

Photometry



Info



Until end of stock